



PRODUCT GUIDE

LED LIGHTING SOLUTIONS | v4

DESIGNED IN THE UK

Why Choose Integrity Lighting?

We design, manufacture and supply dependable LED lighting solutions for projects of every scale. From product selection to bespoke assembly, our team combines practical advice, carefully tested products and responsive UK support.

1 Bespoke by design

LED tape cut to length, professionally soldered, sealed, tested, packed and labelled for your project.

2 Made and tested in the UK

Project-ready assemblies are prepared and checked at our UK facility, with warranty-backed quality.

3 Simpler installation


Custom wiring and low-voltage connection solutions reduce time, complexity and disruption on site.

4 Support from start to finish

Practical guidance for domestic, retail, hospitality, display and architectural lighting projects.

Your Project, Delivered with Integrity

Clear advice. Reliable products. Bespoke solutions prepared for a confident, efficient installation.

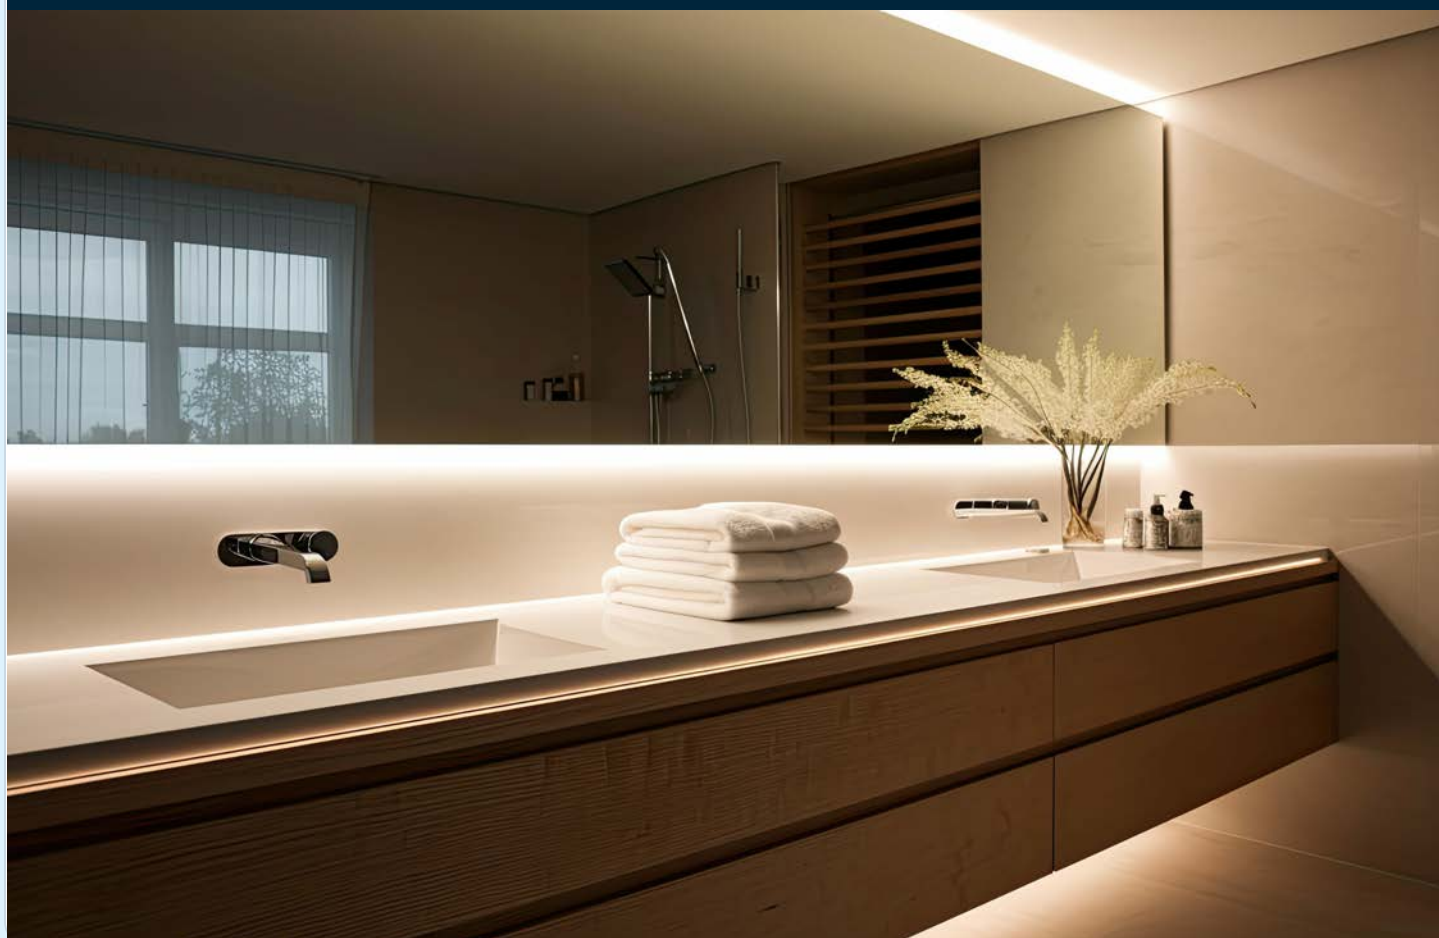

Why work with us?

We are specialist manufacturers of LED tape and linear lighting solutions. Our range of LED tapes offer excellent performance and reliability. Every product in this range has been designed and manufactured to meet the below key requirements:

1 Certification & Compliance

- UKCA, CE & ROHS Marked - Meets and exceeds all UK and EU safety & performance standards.
- TUV Approved - Rigorously tested and approved by German testing house TUV.
- Recolight WEEE Member - Members of Recolight ensuring compliance with all recycling requirements and best practices.

UKCA

CE

ROHS

TUV

WEEE MEMBER

2 Quality & Performance

- LM79 & LM80 - Tested to IESNA approved standards for LED performance over time. 50,000 hours for LED output to reduce to 80% of original light output. Reliability and quality guaranteed.
- SDCM3 - LED tape produced with tight binning controls to ensure no batch variation in colour of LEDs.
- High CRI - All LED tapes meet a minimum 85+ CRI ensuring a high-quality light suitable for a wide variety of applications. Low CRI products can cause the colours in products or surfaces to appear washed out. CRI90, CRI95 and CRI98 products are also available to custom order.

LM79 & LM80

SDCM3

CRI90+

CRI95+

CRI98+

3 Warranty & Aftersales

5

YEAR
WARRANTY

- Our LED tape and LED drivers are supplied with up to a 5 year warranty for a truly fit and forget solution.
- Full technical support available with all data sheets available to download from our website.
- Our experienced and knowledgeable staff are available to answer any technical queries before, during and after installation.

4 Bespoke Manufacturing

- All of LED tapes are available to purchase by the reel or fully bespoke to suit your application.
- Whether you are working on a domestic project, retail installation or a refurbishment of a hotel we can help by making the installation process as simple as possible.
- We offer a professional bespoke cutting service to all customers. We will cut your LED tape to length, professionally solder and seal all connections, comprehensively test and then package and label your product.
- We can supply complete assemblies with various plug-and-play connectors for simple and quick installation. See page 31 for examples of our available connectors and power track.

CUT

SOLDER

SEAL

TEST

PACK & LABEL

LED lighting, made simple

Lighting products

01 COB LED TAPE 05-08

02 SMD LED TAPE 09-14

03 HIGH EFFICIENCY LED TAPE 15-16

04 NEON FLEX 17-22

05 LED DRIVERS 23-27

06 LED CONTROLS 28-29

07 CONNECTORS & ACCESSORIES 30-31

Aluminium profiles

08 PROFILE INDEX 32

01 SURFACE 33-34

02 RECESSED 35

03 CORNER 36

04 PLASTER-IN 37

05 TILE-IN 38

06 SPECIAL 39

COB LED TAPE

CB4W Standard Output COB Tape

4W/M | 24V DC | IP20 | UP TO 400 LM/M | 180 DEGREE BEAM

Efficient, low-output COB tape for soft, continuous illumination in plinths, shelving and decorative details.

- Dot-free 180 degree light output with 480 LEDs per metre
- Reel-to-reel construction improves consistency and reliability
- Dimmable with a compatible 24V constant-voltage driver
- LM80 tested, 50,000-hour LED life and five-year warranty



INPUT 24V DC		PROTECTION IP20		LED LIFE 50,000 HRS		OPERATING RANGE -10 TO 45C	
REEL LENGTH UP TO 5M		WIDTH 8MM		HEIGHT 1.2MM		CUT POINT 50MM	
						CRI ≥90	
PART CODE		W/M	COLOUR TEMP.		LUMEN OUTPUT		
CB4W-24V-27K		4W/M	2700K		360 LM/M		
CB4W-24V-3K		4W/M	3000K		380 LM/M		
CB4W-24V-4K		4W/M	4000K		400 LM/M		

COB LED TAPE

CB6W Ultra Slim COB Tape

6W/M | 24V DC | IP20 | UP TO 630 LM/M | 180 DEGREE BEAM

Ultra-slim 6 mm COB tape designed for narrow joinery, cabinetry and architectural details where space is limited.

- Continuous, dot-free light with 480 LEDs per metre
- High efficacy across four colour-temperature options
- Dimmable with a compatible 24V constant-voltage driver
- LM80 tested, 50,000-hour LED life and five-year warranty



INPUT 24V DC		PROTECTION IP20		LED LIFE 50,000 HRS		OPERATING RANGE -10 TO 45C			
REEL LENGTH UP TO 5M		WIDTH 6MM		HEIGHT 1.2MM		CUT POINT 50MM		CRI ≥90	
PART CODE				W/M		COLOUR TEMP.		LUMEN OUTPUT	
CB6W-24V-27K				6W/M		2700K		560 LM/M	
CB6W-24V-3K				6W/M		3000K		580 LM/M	
CB6W-24V-4K				6W/M		4000K		600 LM/M	
CB6W-24V-6K				6W/M		6000K		630 LM/M	

COB LED TAPE

CB7W Ultra Thin Short Cut LED Tape

7.5W/M | 24V DC | IP20 | UP TO 820 LM/M | 8.33MM CUT POINT

Ultra-thin, short-cut LED tape for precise illumination in detailed joinery, shelving and compact linear applications.

- Only 5 mm wide, with closely spaced 8.33 mm cutting points
- White PCB and diffuser create a clean, continuous appearance
- Dimmable with a compatible 24V constant-voltage driver
- LM80 tested with a five-year product warranty



INPUT 24V DC	PROTECTION IP20	LED LIFE LM80 TESTED	OPERATING RANGE -10 TO 45C
-----------------	--------------------	-------------------------	-------------------------------

REEL LENGTH UP TO 5M	WIDTH 5MM	HEIGHT 1.2MM	CUT POINT 8.33MM	CRI ≥90
-------------------------	--------------	-----------------	---------------------	------------

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
CB7W-24V-27K	7.5W/M	2700K	700 LM/M
CB7W-24V-3K	7.5W/M	3000K	720 LM/M
CB7W-24V-4K	7.5W/M	4000K	800 LM/M
CB7W-24V-5K	7.5W/M	5000K	810 LM/M
CB7W-24V-6K	7.5W/M	6000K	820 LM/M

COB LED TAPE

CB8W High Output COB Tape

8W/M | 24V DC | IP20 | UP TO 800 LM/M | 180 DEGREE BEAM

High-output COB tape for bright, continuous illumination in kitchens, cabinetry and statement details.

- Dot-free 180 degree light output with 480 LEDs per metre
- Reel-to-reel construction improves consistency and reliability
- Dimmable with a compatible 24V constant-voltage driver
- LM80 tested, 50,000-hour LED life and five-year warranty



INPUT 24V DC	PROTECTION IP20	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C
-----------------	--------------------	------------------------	-------------------------------

REEL LENGTH UP TO 5M	WIDTH 8MM	HEIGHT 1.2MM	CUT POINT 50MM	CRI ≥90
-------------------------	--------------	-----------------	-------------------	------------

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
CB8W-24V-27K	8W/M	2700K	750 LM/M
CB8W-24V-3K	8W/M	3000K	770 LM/M
CB8W-24V-4K	8W/M	4000K	800 LM/M
CB8W-24V-6K	8W/M	6000K	800 LM/M

COB LED TAPE

IPCB8W Waterproof High Output COB Tape

8W/M | 24V DC | IP67 | UP TO 800 LM/M | 180 DEGREE BEAM

Durable, fully encapsulated COB tape for continuous high-output lighting in interior and exterior applications.

- Co-extruded silicone housing provides commercial-grade durability
- IP67 protection when correctly terminated and installed
- 10 mm tape width; 12 mm including the IP67 end cap
- Dimmable, LM80 tested and covered by a five-year warranty



INPUT 24V DC	PROTECTION IP67	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C
-----------------	--------------------	------------------------	-------------------------------

REEL LENGTH UP TO 5M	WIDTH 10MM	HEIGHT 4.5MM	CUT POINT 50MM	CRI ≥90
-------------------------	---------------	-----------------	-------------------	------------

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
IPCB8W-24V-27K	8W/M	2700K	750 LM/M
IPCB8W-24V-3K	8W/M	3000K	770 LM/M
IPCB8W-24V-4K	8W/M	4000K	800 LM/M
IPCB8W-24V-6K	8W/M	6000K	800 LM/M

COB LED TAPE

CB11W Long Run COB Tape

11W/M | 24V DC | IP20 | UP TO 1300 LM/M | UP TO 10M RUN

Current-regulated COB tape engineered for long, consistent lines of light from a single-end 24V feed.

- Runs up to 10 m from one end with reduced voltage-drop effects
- Dense 840 LEDs per metre produce continuous 180 degree light
- Three colour temperatures with output up to 1300 lm/m
- Dimmable, LM80 tested and covered by a five-year warranty



INPUT 24V DC	PROTECTION IP20	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C
-----------------	--------------------	------------------------	-------------------------------

REEL LENGTH UP TO 10M	WIDTH 10MM	HEIGHT 2MM	CUT POINT 41.67MM	CRI ≥90
--------------------------	---------------	---------------	----------------------	------------

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
CB11W-24V-3K-IC	11W/M	3000K	1140 LM/M
CB11W-24V-4K-IC	11W/M	4000K	1280 LM/M
CB11W-24V-6K-IC	11W/M	6000K	1300 LM/M

COB LED TAPE

CB15W Tunable White COB Tape

15W/M | 24V DC | IP20 | 2500K-6500K | 120 DEGREE BEAM

Tunable-white COB tape for spaces where the lighting mood and colour temperature need to change throughout the day.

- Dynamic warm-to-cool white adjustment from 2500K to 6500K
- Requires a compatible two-channel tunable-white controller
- 570 lm/m at 3000K with high-quality CRI >90 light
- Premium PCB, genuine 3M backing and five-year warranty



INPUT 24V DC		PROTECTION IP20		LED LIFE 50,000 HRS		OPERATING RANGE -10 TO 45C			
REEL LENGTH UP TO 5M		WIDTH 10MM		HEIGHT 2MM		CUT POINT 26.32MM		CRI >90	
PART CODE				W/M		COLOUR TEMP.		LUMEN OUTPUT	
CB15W-24V-TW				15W/M		2500K-6500K		570 LM/M	

COB LED TAPE

CBRGBW Colour Changing COB Tape

20W/M | 24V DC | IP20 | RGB + WHITE | 140 DEGREE BEAM

Dotless RGBW COB tape combining vivid colour effects with a dedicated high-quality white channel for practical illumination.

- Dense 672 LEDs per metre create a continuous dot-free finish
- White channel available in 2700K, 3000K, 4000K and 6000K
- Independent RGBW control requires a compatible LED controller
- Intertek tested, dimmable and covered by a five-year warranty



INPUT 24V DC		PROTECTION IP20		LED LIFE 50,000 HRS		OPERATING RANGE -10 TO 45C					
REEL LENGTH UP TO 5M		WIDTH 14MM		HEIGHT 2.1MM		CUT POINT 83.3MM		CRI ≥90			
CHANNEL				OUTPUT		CHANNEL				OUTPUT	
RED				120 LM/M		GREEN				400 LM/M	
BLUE				44 LM/M		WHITE 4000K				440 LM/M	

SMD LED TAPE

LS5W Low Consumption 12V SMD Tape

4.8W/M | 12V DC | IP20 | UP TO 545 LM/M | 120 DEGREE BEAM

Low-consumption SMD tape for compact 12V lighting systems, plinths, shelving and decorative details.

- Efficient 2835 LEDs provide up to 545 lm/m from 4.8 W/m
- 12V operation suits compact systems and mobile applications
- Four colour temperatures with consistent CRI >85 output
- Dimmable, LM80 tested and covered by a five-year warranty



5
YEAR
WARRANTY

UKCA

CE

INPUT
12V DC

PROTECTION
IP20

LED LIFE
50,000 HRS

OPERATING RANGE
-10 TO 45C

REEL LENGTH
UP TO 6M

WIDTH
8MM

HEIGHT
1.2MM

CUT POINT
100MM

CRI
>85

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
LS5W-12V-27K	4.8W/M	2700K	500 LM/M
LS5W-12V-3K	4.8W/M	3000K	520 LM/M
LS5W-12V-4K	4.8W/M	4000K	545 LM/M
LS5W-12V-6K	4.8W/M	6000K	545 LM/M

SMD LED TAPE

LS5W Low Consumption 24V SMD Tape

4.8W/M | 24V DC | IP20 | UP TO 545 LM/M | UP TO 12M

Longer-run low-consumption SMD tape for continuous architectural details, display lighting and joinery.

- Runs up to 12 m for longer continuous lines of light
- Efficient 2835 LEDs provide up to 545 lm/m
- Four colour temperatures with consistent CRI >85 output
- Dimmable, LM80 tested and covered by a five-year warranty



5
YEAR
WARRANTY

UKCA

CE

INPUT
24V DC

PROTECTION
IP20

LED LIFE
50,000 HRS

OPERATING RANGE
-10 TO 45C

REEL LENGTH
UP TO 12M

WIDTH
8MM

HEIGHT
1.2MM

CUT POINT
100MM

CRI
>85

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
LS5W-24V-27K	4.8W/M	2700K	500 LM/M
LS5W-24V-3K	4.8W/M	3000K	520 LM/M
LS5W-24V-4K	4.8W/M	4000K	545 LM/M
LS5W-24V-6K	4.8W/M	6000K	545 LM/M

SMD LED TAPE

IP5W Low Consumption IP65 Waterproof SMD Tape

4.8W/M | 24V DC | IP65 | UP TO 450 LM/M | UP TO 10M

Low-consumption encapsulated SMD tape for dependable lighting in kitchens, bathrooms and exterior details.

- IP65 sleeve encapsulates the front and back of the tape
- Runs up to 10 m for longer protected lighting details
- Efficient 2835 LEDs provide up to 450 lm/m
- Dimmable, LM79/LM80 tested and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE



INPUT 24V DC	PROTECTION IP65	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C	
REEL LENGTH UP TO 10M	WIDTH 10MM	HEIGHT 3.5MM	CUT POINT 100MM	CRI ≥85

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
IP5W-24V-27K	4.8W/M	2700K	370 LM/M
IP5W-24V-3K	4.8W/M	3000K	390 LM/M
IP5W-24V-4K	4.8W/M	4000K	420 LM/M
IP5W-24V-6K	4.8W/M	6000K	450 LM/M

SMD LED TAPE

LS10W High Density 12V SMD Tape

9.6W/M | 12V DC | IP20 | UP TO 1025 LM/M | 25MM CUT POINT

High-density SMD tape for brighter under-cabinet, display and detailed joinery lighting on 12V systems.

- Dense 120 LEDs per metre provide smooth, high-output light
- Short 25 mm cut points support precise made-to-measure details
- Runs up to 6 m with output reaching 1025 lm/m
- Dimmable, LM80 tested and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE



INPUT 12V DC	PROTECTION IP20	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C	
REEL LENGTH UP TO 6M	WIDTH 8MM	HEIGHT 1.2MM	CUT POINT 25MM	CRI ≥85

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
LS10W-12V-27K	9.6W/M	2700K	980 LM/M
LS10W-12V-3K	9.6W/M	3000K	995 LM/M
LS10W-12V-4K	9.6W/M	4000K	1025 LM/M
LS10W-12V-6K	9.6W/M	6000K	1025 LM/M

SMD LED TAPE

LS10W High Density 24V SMD Tape

9.6W/M | 24V DC | IP20 | UP TO 1025 LM/M | UP TO 12M

High-density 24V SMD tape for longer under-cabinet, display and continuous architectural lighting details.

- Runs up to 12 m for longer continuous lighting installations
- Dense 120 LEDs per metre provide smooth, high-output light
- Four colour temperatures with output reaching 1025 lm/m
- Dimmable, LM80 tested and covered by a five-year warranty



INPUT 24V DC	PROTECTION IP20	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C
REEL LENGTH UP TO 12M	WIDTH 8MM	HEIGHT 1.2MM	CUT POINT 50MM
			CRI ≥85

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
LS10W-24V-27K	9.6W/M	2700K	980 LM/M
LS10W-24V-3K	9.6W/M	3000K	995 LM/M
LS10W-24V-4K	9.6W/M	4000K	1025 LM/M
LS10W-24V-6K	9.6W/M	6000K	1025 LM/M

SMD LED TAPE

IP10W High Density IP65 Waterproof SMD Tape

9.6W/M | 24V DC | IP65 | UP TO 1025 LM/M | UP TO 10M

High-output encapsulated SMD tape for bright, protected lighting in kitchens, bathrooms and exterior details.

- IP65 protection supports internal and external installations
- Dense 120 LEDs per metre provide smooth, high-output light
- Runs up to 10 m with output reaching 1025 lm/m
- Dimmable, LM80 tested and covered by a five-year warranty



INPUT 24V DC	PROTECTION IP65	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C
REEL LENGTH UP TO 10M	WIDTH 10MM	HEIGHT 3.5MM	CUT POINT 50MM
			CRI ≥85

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
IP10W-24V-27K	9.6W/M	2700K	980 LM/M
IP10W-24V-3K	9.6W/M	3000K	995 LM/M
IP10W-24V-4K	9.6W/M	4000K	1025 LM/M
IP10W-24V-6K	9.6W/M	6000K	1025 LM/M

SMD LED TAPE

LS15W High Density 24V SMD Tape

14.4W/M | 24V DC | IP20 | UP TO 1445 LM/M | UP TO 10M

High-density SMD tape for brighter architectural details, joinery and applications requiring increased lumen output.

- Dense 120 LEDs per metre provide smooth, high-output light
- Runs up to 10 m for longer continuous installations
- Four colour temperatures with output reaching 1445 lm/m
- Dimmable, LM80 tested and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE



INPUT 24V DC	PROTECTION IP20	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C	
REEL LENGTH UP TO 10M	WIDTH 8MM	HEIGHT 1.2MM	CUT POINT 50MM	CRI ≥85

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
LS15W-24V-27K	14.4W/M	2700K	1330 LM/M
LS15W-24V-3K	14.4W/M	3000K	1360 LM/M
LS15W-24V-4K	14.4W/M	4000K	1425 LM/M
LS15W-24V-6K	14.4W/M	6000K	1445 LM/M

SMD LED TAPE

LS17W High Output 24V SMD Tape

16.32W/M | 24V DC | IP20 | UP TO 1900 LM/M | 240 Leds/M

Ultra-dense, high-output SMD tape for continuous illumination and demanding applications that need primary-lighting levels.

- 240 LEDs per metre minimise visible spotting in linear details
- Short 25 mm cut points support accurate made-to-measure runs
- Continuous lengths up to 12 m with output reaching 1900 lm/m
- Dimmable, LM79/LM80 tested and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE



INPUT 24V DC	PROTECTION IP20	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C	
REEL LENGTH UP TO 12M	WIDTH 10MM	HEIGHT 1.2MM	CUT POINT 25MM	CRI ≥90

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
LS17W-24V-27K	16.32W/M	2700K	1600 LM/M
LS17W-24V-3K	16.32W/M	3000K	1700 LM/M
LS17W-24V-4K	16.32W/M	4000K	1850 LM/M
LS17W-24V-6K	16.32W/M	6000K	1900 LM/M

SMD LED TAPE

LSRGB15 Colour Changing 24V SMD Tape

14.4W/M | 24V DC | IP20 | RGB | 600 LM/M

High-output RGB SMD tape for bold colour-changing effects in interior architectural and entertainment applications.

- 5050 RGB LEDs create smooth, controllable mixed-colour effects
- Requires a compatible RGB controller for colour selection
- Runs up to 10 m with combined RGB output of 600 lm/m
- Dimmable, LM79/LM80 tested and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE



INPUT 24V DC		PROTECTION IP20		LED LIFE 50,000 HRS		OPERATING RANGE -10 TO 45C			
REEL LENGTH UP TO 10M		WIDTH 10MM		HEIGHT 1.2MM		CUT POINT 50MM		LEDS / M 60	
PART CODE				W/M		COLOUR TEMP.		LUMEN OUTPUT	
LSRGB15-24V				14.4W/M		RGB		600 LM/M	

SMD LED TAPE

IPRGB15 IP65 Waterproof Colour Changing RGB SMD Tape

14.4W/M | 24V DC | IP65 | RGB | 600 LM/M

Encapsulated high-output RGB SMD tape for colour-changing effects in protected interior and exterior applications.

- IP65 construction encapsulates the front and back of the tape
- 5050 RGB LEDs create smooth, controllable mixed-colour effects
- Runs up to 10 m with combined RGB output of 600 lm/m
- Dimmable, LM79/LM80 tested and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE



INPUT 24V DC		PROTECTION IP65		LED LIFE 50,000 HRS		OPERATING RANGE -10 TO 45C			
REEL LENGTH UP TO 10M		WIDTH 12MM		HEIGHT 3.5MM		CUT POINT 50MM		LEDS / M 60	
PART CODE				W/M		COLOUR TEMP.		LUMEN OUTPUT	
IPRGB15-24V				14.4W/M		RGB		600 LM/M	

SMD LED TAPE

LSRGBW Colour Changing 24V SMD Tape

19.2W/M | 24V DC | IP20 | RGB + WHITE | 800 LM/M

High-output RGBW SMD tape combining full colour control with a dedicated white channel for practical illumination.

- Integrated 5050 RGB + white LEDs support colour and white scenes
- White channel available in 3000K or 4000K
- Runs up to 12 m and requires a compatible RGBW controller
- Dimmable, LM79/LM80 tested and covered by a five-year warranty



INPUT 24V DC		PROTECTION IP20		LED LIFE 50,000 HRS		OPERATING RANGE -10 TO 45C			
REEL LENGTH UP TO 12M		WIDTH 12MM		HEIGHT 1.8MM		CUT POINT 100MM		LEDS / M 60	
PART CODE				W/M		COLOUR TEMP.		LUMEN OUTPUT	
LSRGBW-24V-3K				19.2W/M		RGB + 3000K		800 LM/M	
LSRGBW-24V-4K				19.2W/M		RGB + 4000K		800 LM/M	

SMD LED TAPE

IPRGBW IP65 Waterproof Colour Changing RGBW SMD Tape

19.2W/M | 24V DC | IP65 | RGB + WHITE | 800 LM/M

Encapsulated RGBW SMD tape providing colour-changing effects and dedicated white light in protected applications.

- IP65 construction encapsulates the front and back of the tape
- Integrated 5050 RGB + white LEDs support colour and white scenes
- Runs up to 10 m and requires a compatible RGBW controller
- Dimmable, LM79/LM80 tested and covered by a five-year warranty



INPUT 24V DC		PROTECTION IP65		LED LIFE 50,000 HRS		OPERATING RANGE -10 TO 45C			
REEL LENGTH UP TO 10M		WIDTH 14MM		HEIGHT 3.5MM		CUT POINT 100MM		LEDS / M 60	
PART CODE				W/M		COLOUR TEMP.		LUMEN OUTPUT	
IPRGBW20-24V-3K				19.2W/M		RGB + 3000K		800 LM/M	
IPRGBW20-24V-4K				19.2W/M		RGB + 4000K		800 LM/M	


HIGH EFFICIENCY

HE2W Grade A High Efficiency LED Tape

2W/M | 24V DC | IP20 | 455 LM/M | 227 LM/W

Ultra-low-consumption Grade A LED tape for retail, point-of-sale and continuous lighting where energy use is critical.

- Exceptional efficacy of up to 227 lumens per watt
- Dense 128 LEDs per metre support excellent visual uniformity
- Low heat generation suits retail displays and enclosed details
- Dimmable, 50,000-hour rated and covered by a five-year warranty



INPUT 24V DC	PROTECTION IP20	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C
-----------------	--------------------	------------------------	-------------------------------

REEL LENGTH UP TO 5M	WIDTH 8MM	HEIGHT 1.2MM	CUT POINT 62.5MM	CRI >80
-------------------------	--------------	-----------------	---------------------	------------

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
HE2W-24V-3K	2W/M	3000K	455 LM/M
HE2W-24V-4K	2W/M	4000K	455 LM/M
HE2W-24V-5K	2W/M	5000K	455 LM/M
HE2W-24V-6K	2W/M	6000K	455 LM/M


HIGH EFFICIENCY

HE4W Grade A High Efficiency LED Tape

4W/M | 24V DC | IP20 | 910 LM/M | 227 LM/W

High-output Grade A LED tape delivering strong illumination with exceptionally low energy consumption and heat.

- Exceptional efficacy of up to 227 lumens per watt
- Dense 128 LEDs per metre support excellent visual uniformity
- Up to 910 lm/m for brighter retail and display applications
- Dimmable and covered by a five-year product warranty



INPUT 24V DC	PROTECTION IP20	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C
-----------------	--------------------	------------------------	-------------------------------

REEL LENGTH UP TO 5M	WIDTH 8MM	HEIGHT 1.2MM	CUT POINT 62.5MM	CRI >80
-------------------------	--------------	-----------------	---------------------	------------

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
HE4W-24V-3K	4W/M	3000K	910 LM/M
HE4W-24V-4K	4W/M	4000K	910 LM/M
HE4W-24V-5K	4W/M	5000K	910 LM/M
HE4W-24V-6K	4W/M	6000K	910 LM/M

HIGH EFFICIENCY

HE15W Grade B High Efficiency LED Tape

15W/M | 24V DC | IP20 | UP TO 2660 LM/M | 185 LM/W


High-output Grade B LED tape engineered for powerful, energy-conscious linear lighting in retail, commercial and architectural installations.

- Up to 2660 lm/m with efficacy exceeding 185 lm/w
- 128 LEDs per metre for smooth, consistent illumination
- Single-bin colour selection for reliable colour consistency
- Dimmable, 50,000-hour rated and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE

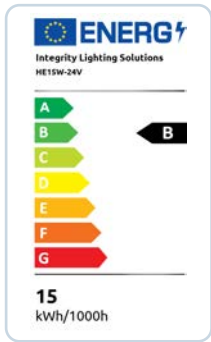

INPUT
24V DC

PROTECTION
IP20

LED LIFE
50,000 HRS

OPERATING RANGE
-10 TO 45C

REEL LENGTH
UP TO 10M


WIDTH
10MM

HEIGHT
1.2MM

CUT POINT
62.5MM

CRI
≥80

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
HE15W-24V-27K	15W/M	2700K	2400 LM/M
HE15W-24V-3K	15W/M	3000K	2445 LM/M
HE15W-24V-4K	15W/M	4000K	2545 LM/M
HE15W-24V-6K	15W/M	6000K	2660 LM/M

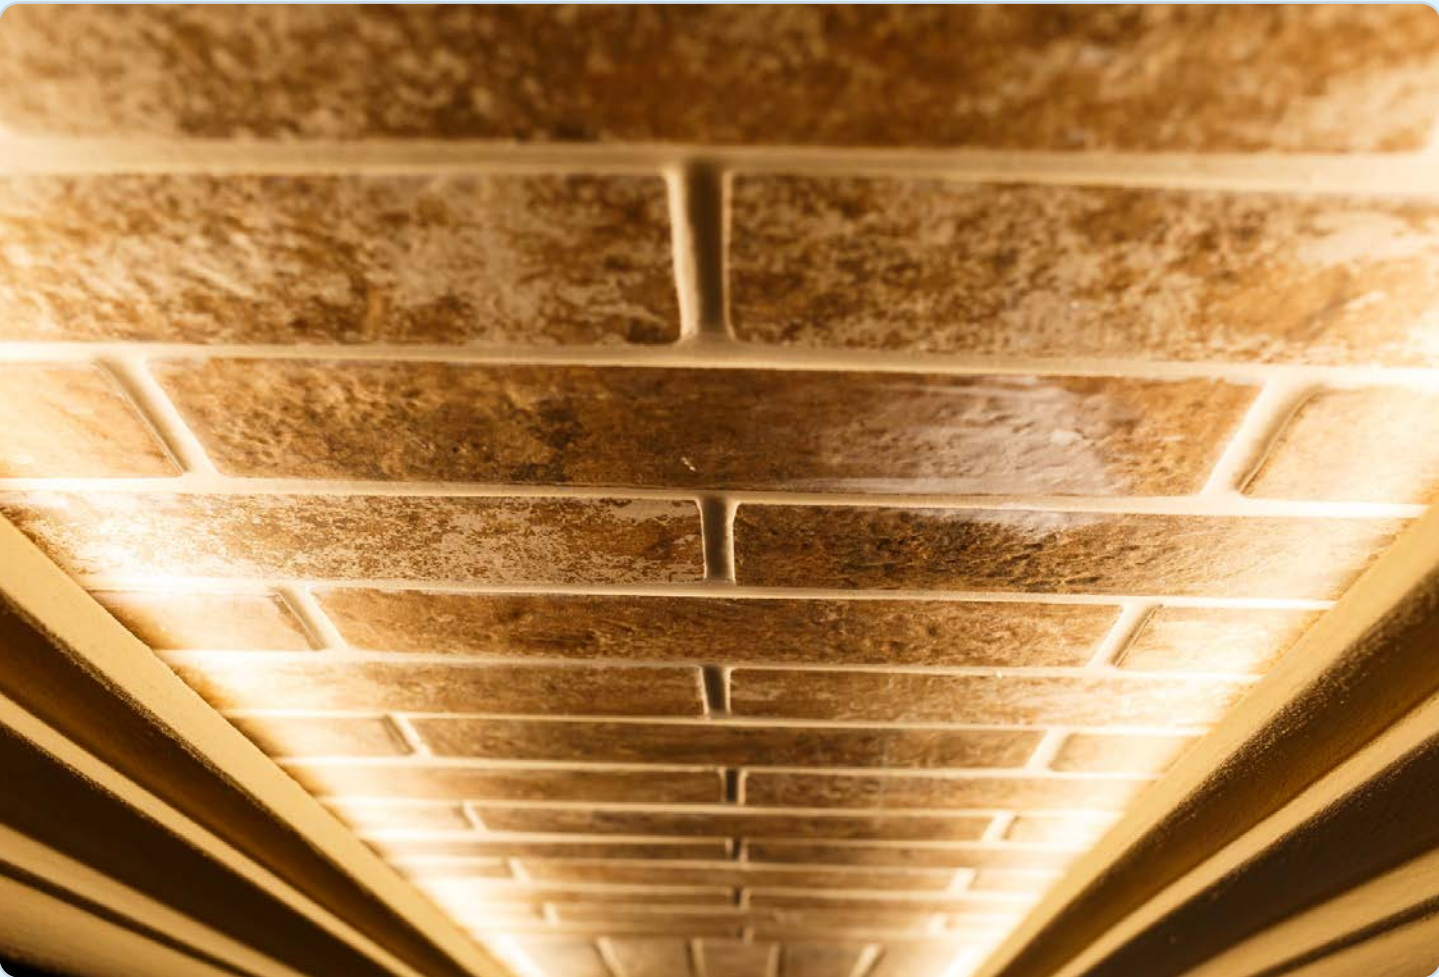

NEON FLEX

Flexible light. Seamless architectural detail.

A versatile range of continuous, dot-free neon flex for straight lines, sweeping curves and expressive three-dimensional forms. Select the bend direction and profile size to suit the installation detail.

PAGE 18

Vertical Bend

NF1010 10 x 10mm vertical bend neon flex	18
NF1616 16 x 16mm vertical bend neon flex	18

PAGES 19-20

Horizontal Bend

NF0410 4 x 10mm horizontal bend neon flex	19
NF0816 8 x 16mm horizontal bend neon flex	20
NF1018 10 x 18mm long-run horizontal bend	20

PAGE 21

3D Bend

NF0808 8 x 8mm 3D bend neon flex	21
NF1816 18 x 16mm 3D bend neon flex	21

PAGE 22

360 Degree

NF360R18 18mm diameter 360 illuminated neon flex	22
NF360R25 25mm diameter 360 illuminated neon flex	22

VERTICAL BEND NEON FLEX

NF1010 10 x 10mm Vertical Bend Neon Flex

14W/M | 24V DC | IP65 / IP67 | UP TO 1400 LM/M | 120 DEGREE BEAM


Miniature square-profile neon flex for crisp continuous lines in joinery, shelving and architectural details.

- Vertical-bend construction curves concave or convex along its length
- 182 LEDs per metre; IP65 standard and IP67 with moulded connections
- Dimmable, LM80 tested and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE

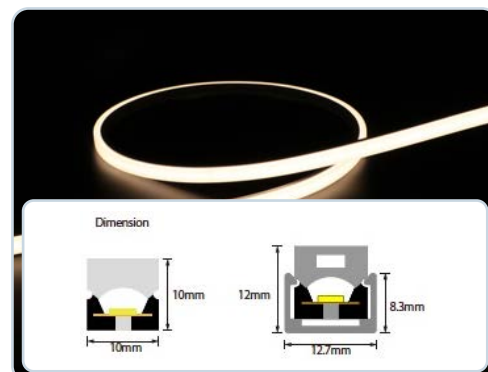INPUT
24V DCPROTECTION
IP65 / IP67LED LIFE
50,000 HRSOPERATING RANGE
-10 TO 45CREEL LENGTH
UP TO 5MWIDTH
10MMHEIGHT
10MMCUT POINT
33.3MMCRI
≥90

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
NF1010-VB-24V-27K	14W/M	2700K	1300 LM/M
NF1010-VB-24V-3K	14W/M	3000K	1350 LM/M
NF1010-VB-24V-4K	14W/M	4000K	1375 LM/M
NF1010-VB-24V-6K	14W/M	6000K	1400 LM/M
NF1010-VB-24V-RGB	14W/M	RGB	450 LM/M

VERTICAL BEND NEON FLEX

NF1616 16 x 16mm Vertical Bend Neon Flex

16W/M WHITE | 15W/M RGBW | 24V DC | IP65 / IP67 | UP TO 960 LM/M


Larger square-profile vertical-bend neon flex for robust, high-impact linear lighting indoors and outdoors.

- Smooth face illumination with a 120 degree beam angle
- White-light CRI >90; RGBW includes a dedicated 4000K white
- Dimmable, LM80 tested and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE

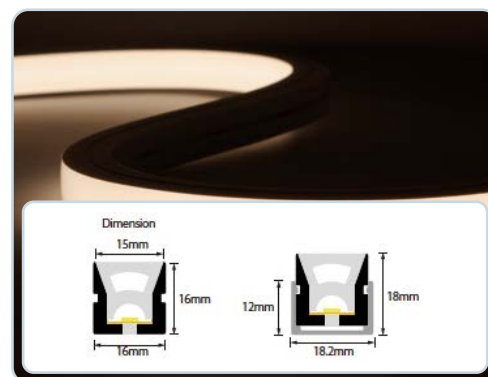INPUT
24V DCPROTECTION
IP65 / IP67LED LIFE
50,000 HRSOPERATING RANGE
-10 TO 45CREEL LENGTH
UP TO 5MWIDTH
16MMHEIGHT
16MMCUT POINT
50 / 67MMCRI
≥90 / ≥80

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
NF1616-VB-24V-27K	16W/M	2700K	920 LM/M
NF1616-VB-24V-3K	16W/M	3000K	940 LM/M
NF1616-VB-24V-4K	16W/M	4000K	950 LM/M
NF1616-VB-24V-6K	16W/M	6000K	960 LM/M
NF1616-VB-24V-RGBW	15W/M	RGBW 4000K	670 LM/M

HORIZONTAL BEND NEON FLEX

NF0410 4 x 10mm Horizontal Bend Neon Flex

10W/M | 24V DC | IP65 / IP67 | UP TO 160 LM/M


Micro-profile horizontal-bend neon flex for fine illuminated lines in shelving, joinery and detailed architectural features.

- Side-bending 4mm illuminated face for tight curves and fine details
- 144 LEDs per metre create a dot-free, continuous appearance
- IP65/IP67, dimmable, LM80 tested and covered by a five-year warranty

5
YEAR
WARRANTY

UKCA

CE

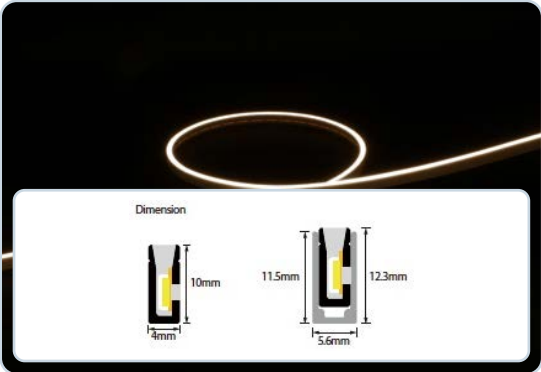

INPUT 24V DC	PROTECTION IP65 / IP67	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C
-----------------	---------------------------	------------------------	-------------------------------

REEL LENGTH UP TO 5M	WIDTH 4MM	HEIGHT 10MM	CUT POINT 41.6MM	CRI ≥90
-------------------------	--------------	----------------	---------------------	------------

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
NF0410-HB-24V-27K	10W/M	2700K	130 LM/M
NF0410-HB-24V-3K	10W/M	3000K	140 LM/M
NF0410-HB-24V-4K	10W/M	4000K	150 LM/M
NF0410-HB-24V-6K	10W/M	6000K	160 LM/M



HORIZONTAL BEND NEON FLEX

NF0816 8 x 16mm Horizontal Bend Neon Flex

12W/M | 24V DC | IP65 / IP67 | UP TO 545 LM/M | 120 DEGREE BEAM

Compact horizontal-bend neon flex for smooth illuminated curves in joinery, shelving and architectural details.


- Face and side-edge illumination from 140 LEDs per metre
- White-light and RGB options with a continuous dot-free appearance
- IP65/IP67, dimmable, LM80 tested and covered by a five-year warranty

5

YEAR
WARRANTY

UKCA

CE

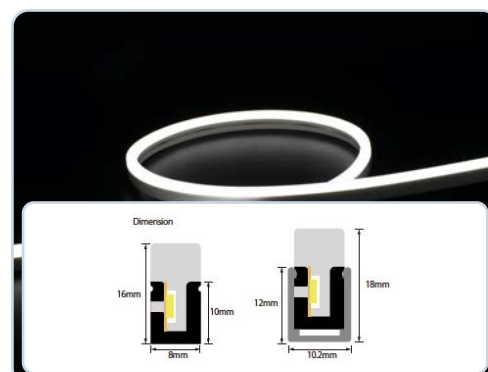INPUT
24V DCPROTECTION
IP65 / IP67LED LIFE
50,000 HRSOPERATING RANGE
-10 TO 45CREEL LENGTH
UP TO 5MWIDTH
8MMHEIGHT
16MMCUT POINT
50MMCRI
≥90

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
NF0816-HB-24V-27K	12W/M	2700K	495 LM/M
NF0816-HB-24V-3K	12W/M	3000K	500 LM/M
NF0816-HB-24V-4K	12W/M	4000K	535 LM/M
NF0816-HB-24V-6K	12W/M	6000K	545 LM/M
NF0816-HB-24V-RGB	12W/M	RGB	200 LM/M

HORIZONTAL BEND NEON FLEX

NF1018 10 x 18mm Long Run Neon Flex

10W/M | 24V DC | IP65 / IP67 | UP TO 20M | UP TO 290 LM/M

Single-end-powered long-run neon flex for uninterrupted exterior lines, landscaping and large architectural features.

- Lengths up to 20 metres from one power connection
- UV-resistant silicone housing for internal and external use
- IP65/IP67, dimmable, LM80 tested and covered by a five-year warranty

5

YEAR
WARRANTY

UKCA

CE

INPUT
24V DCPROTECTION
IP65 / IP67LED LIFE
50,000 HRSOPERATING RANGE
-10 TO 45CREEL LENGTH
UP TO 20MWIDTH
10MMHEIGHT
18MMCUT POINT
50MMCRI
≥90

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
NF1018-24V-27K	10W/M	2700K	240 LM/M
NF1018-24V-3K	10W/M	3000K	260 LM/M
NF1018-24V-4K	10W/M	4000K	290 LM/M
NF1018-24V-6K	10W/M	6000K	290 LM/M


3D BEND NEON FLEX

NF0808 8 x 8mm 3D Bend Neon Flex

6W/M | 24V DC | IP67 | UP TO 312 LM/M | CUT ANYWHERE

Ultra-compact free-bend neon flex for detailed shapes, tight contours and expressive illuminated features.

- Bends vertically and horizontally for maximum design freedom
- UV-resistant 8 x 8mm silicone housing with a 120 degree beam
- IP67, dimmable, LM80 tested and covered by a five-year warranty

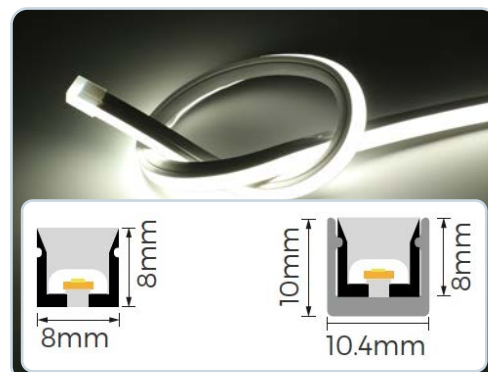

INPUT 24V DC		PROTECTION IP67	LED LIFE LM80 TESTED	OPERATING RANGE -10 TO 45C	
REEL LENGTH UP TO 5M		WIDTH 8MM	HEIGHT 8MM	CUT POINT ANYWHERE	CRI >90
PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT		
NF0808-24V-27K	6W/M	2700K	288 LM/M		
NF0808-24V-3K	6W/M	3000K	300 LM/M		
NF0808-24V-4K	6W/M	4000K	312 LM/M		
NF0808-24V-6K	6W/M	6000K	312 LM/M		


3D BEND NEON FLEX

NF1816 18 x 16mm 3D Bend Neon Flex

14W/M | 24V DC | IP65 / IP67 | UP TO 760 LM/M | 120 DEGREE BEAM

High-output 3D free-bend neon flex for furniture, retail displays and large illuminated feature forms.

- Bendable and twistable in both directions for complex shapes
- 120 LEDs per metre provide consistent dot-free illumination
- IP65/IP67, dimmable, LM80 tested and covered by a five-year warranty

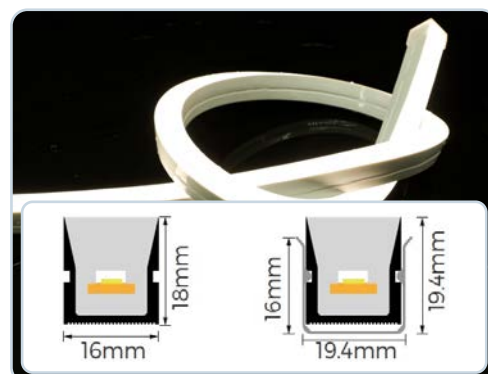

INPUT 24V DC		PROTECTION IP65 / IP67	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 100C	
REEL LENGTH UP TO 10M		WIDTH 18MM	HEIGHT 16MM	CUT POINT 25MM	CRI >90
PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT		
NF1816-24V-27K	14W/M	2700K	700 LM/M		
NF1816-24V-3K	14W/M	3000K	740 LM/M		
NF1816-24V-4K	14W/M	4000K	760 LM/M		
NF1816-24V-6K	14W/M	6000K	760 LM/M		

360 DEGREE NEON FLEX

NF360R18 18mm 360 Degree Neon Flex

11W/M | 24V DC | IP65 | UP TO 780 LM/M | CUT ANYWHERE

Slim, fully illuminated 360-degree neon flex for suspended forms, signage and expressive architectural features.

- Uniform light around the complete 18mm circular surface
- Free-bending UV-resistant silicone housing with no dark areas
- IP65, dimmable and covered by a five-year product warranty



Φ18mm (Φ0.7") Diameter



INPUT 24V DC	PROTECTION IP65	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C	
REEL LENGTH UP TO 5M	WIDTH 18MM DIA	HEIGHT 18MM	CUT POINT ANYWHERE	CRI >90

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
NF360R18-24V-27K	11W/M	2700K	740 LM/M
NF360R18-24V-3K	11W/M	3000K	770 LM/M
NF360R18-24V-4K	11W/M	4000K	780 LM/M
NF360R18-24V-6K	11W/M	6000K	780 LM/M


360 DEGREE NEON FLEX

NF360R25 25mm 360 Degree Neon Flex

14W/M WHITE | 18W/M RGBW | 24V DC | IP65 | UP TO 925 LM/M

Larger 25mm fully illuminated neon flex for bold suspended lighting, sculptural curves and colour-changing features.

- Uniform 360-degree illumination with excellent flexibility
- All white colour temperatures cut anywhere; RGBW cuts every 62mm
- IP65, dimmable and covered by a five-year product warranty

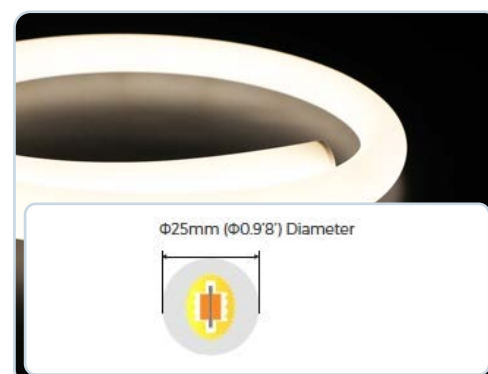

Φ25mm (Φ0.9") Diameter




INPUT 24V DC	PROTECTION IP65	LED LIFE 50,000 HRS	OPERATING RANGE -10 TO 45C	
REEL LENGTH UP TO 5M	WIDTH 25MM DIA	HEIGHT 25MM	CUT POINT WHITE ANY / RGBW 62MM	CRI >90 / >80

PART CODE	W/M	COLOUR TEMP.	LUMEN OUTPUT
NF360R25-24V-27K	14W/M	2700K	855 LM/M
NF360R25-24V-3K	14W/M	3000K	900 LM/M
NF360R25-24V-4K	14W/M	4000K	925 LM/M
NF360R25-24V-6K	14W/M	6000K	925 LM/M
NF360R25-24V-RGBW	18W/M	RGBW 4000K	300 LM/M

DRIVERS, CONTROLS & ACCESSORIES

Power, control and connect complete lighting systems

COMPLETE SOLUTIONS

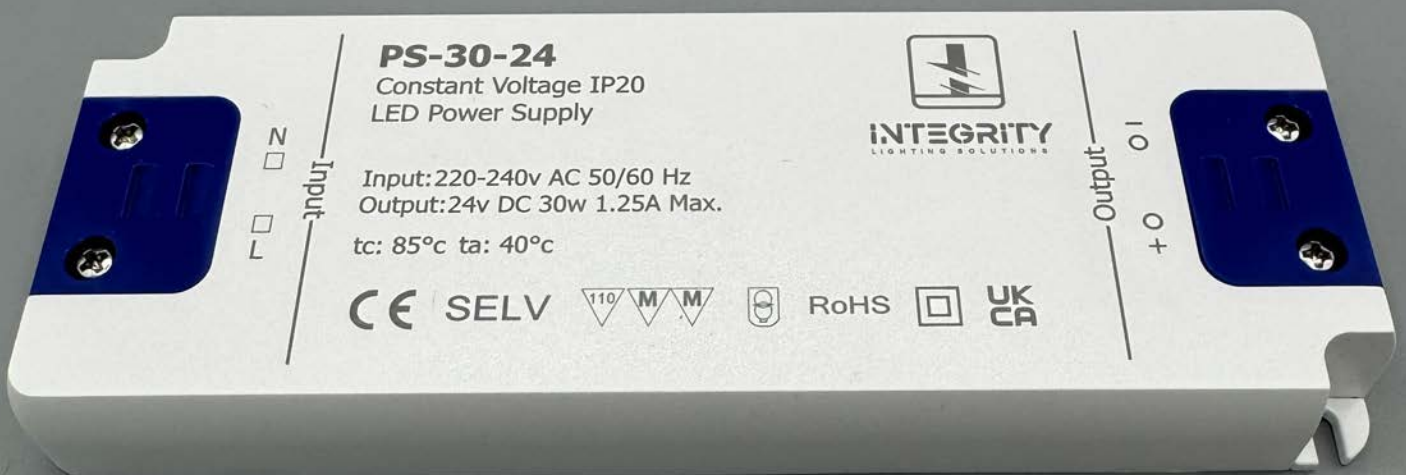

LED DRIVERS

PS Non-Dimmable IP20 Driver Range - 12V DC

12V DC OUTPUT | 15W TO 180W | IP20 | 5 YEAR WARRANTY

Reliable constant-voltage power supplies for 12V LED tape, neon flex and other low-voltage lighting products.

- Low-profile design with covered screw terminals and cable restraint
- Short-circuit, overload and over-voltage protection
- Five output ratings for accurate driver selection



INPUT	OUTPUT	PROTECTION	CONTROL
220-240V AC	12V DC	IP20	NON-DIMMABLE

PART CODE	MAX LOAD	OUTPUT	IP RATING	DIMENSIONS
PS-15-12	15W (1.25A)	12V DC	IP20	103 x 33.5 x 16.5MM
PS-30-12	30W (2.5A)	12V DC	IP20	160 x 50 x 14MM
PS-50-12	50W (4.15A)	12V DC	IP20	160 x 50 x 14MM
PS-100-12	100W (8.3A)	12V DC	IP20	160 x 50 x 14MM
PS-180-12	180W (15A)	12V DC	IP20	195 x 67 x 31.2MM


LED DRIVERS

PS Non-Dimmable IP20 Driver Range - 24V DC

24V DC OUTPUT | 15W TO 200W | IP20 | 5 YEAR WARRANTY

Reliable constant-voltage power supplies for 24V LED tape, neon flex and other low-voltage lighting products.

- Low-profile design with covered screw terminals and cable restraint
- Short-circuit, overload and over-voltage protection
- Five output ratings for accurate driver selection

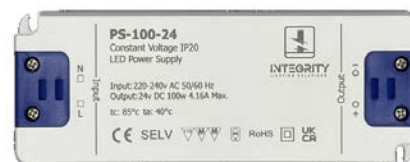

INPUT	OUTPUT	PROTECTION	CONTROL
220-240V AC	24V DC	IP20	NON-DIMMABLE

PART CODE	MAX LOAD	OUTPUT	IP RATING	DIMENSIONS
PS-15-24	15W (0.625A)	24V DC	IP20	103 x 33.5 x 16.5MM
PS-30-24	30W (1.25A)	24V DC	IP20	160 x 50 x 14MM
PS-50-24	50W (2.08A)	24V DC	IP20	160 x 50 x 14MM
PS-100-24	100W (4.15A)	24V DC	IP20	160 x 50 x 14MM
PS-200-24	200W (8.3A)	24V DC	IP20	195 x 67 x 31.2MM

LED DRIVERS

PSSLIM 24V Ultra-Slim LED Driver Range

24V DC OUTPUT | 100W / 220W | IP20 | 5 YEAR WARRANTY

Ultra-slim, flicker-free constant-voltage drivers for light boxes and installations where enclosure width is restricted.

- Up to 92% efficiency with power factor ≥ 0.95 at full load
- Overvoltage, overload and short-circuit protection with automatic recovery
- Quick-connect terminals, Class II protection and 30,000+ hour life

5

YEAR
WARRANTY

UKCA

CE

INPUT
220-240V ACOUTPUT
24V DCPROTECTION
IP20CONTROL
NON-DIMMABLE

PART CODE	MAX LOAD	OUTPUT	IP RATING	DIMENSIONS
PSSLIM-100-24	100W (4.16A)	24V DC	IP20	320 x 30 x 19MM
PSSLIM-220-24	220W (9.16A)	24V DC	IP20	360 x 32 x 24MM

LED DRIVERS

IP-Rated Waterproof LED Driver Range

12V / 24V DC OUTPUT | 40W TO 480W | IP65 / IP67 | UP TO 7 YEAR WARRANTY

Fully encapsulated constant-voltage drivers for dependable operation in damp, wet and external locations.

- PSIP models rated IP65; HLG models rated IP67
- Short-circuit, overload and over-voltage protection
- PSIP: 3-year warranty; HLG: 5-year or 7-year warranty

UP TO
7
YEAR
WARRANTY

UKCA

CE

INPUT
220-240V ACOUTPUT
12V / 24V DCPROTECTION
IP65 / IP67CONTROL
NON-DIMMABLE

PART CODE	MAX LOAD	OUTPUT VOLTAGE	IP RATING
PSIP-40-12/24	40W	12V / 24V DC	IP65
PSIP-60-12/24	60W	12V / 24V DC	IP65
PSIP-100-12/24	100W	12V / 24V DC	IP65
HLG-240-12/24	240W	12V / 24V DC	IP67
HLG-320-12/24	320W	12V / 24V DC	IP67
HLG-480-12/24	480W	12V / 24V DC	IP67

LED DRIVERS

0-10V Analogue Dimmable LED Driver Range

12V / 24V DC OUTPUT | 45W TO 200W | IP20 | 0-10V DIMMABLE

Constant-voltage drivers for smooth integration with compatible 0-10V analogue lighting-control systems.

- PWM dimming for 12V and 24V constant-voltage LED products
- Short-circuit, overload and over-voltage protection
- Four power ratings from 45W to 200W with a three-year warranty



INPUT	OUTPUT	PROTECTION	CONTROL
100-265V AC	12V / 24V DC	IP20	0-10V DIMMABLE

PART CODE	MAX LOAD	OUTPUT VOLTAGE	IP RATING
ELED-45V-12/24	45W	12V / 24V DC	IP20
ELED-60V-12/24	60W	12V / 24V DC	IP20
ELED-100V-12/24	100W	12V / 24V DC	IP20
ELED-200V-12/24	200W	12V / 24V DC	IP20

LED DRIVERS

PSDALI DALI-2 + Push Dim Driver Range

12V / 24V DC OUTPUT | 30W TO 200W | IP66 | DALI-2 + PUSH DIM

IP66 constant-voltage drivers combining certified DALI-2 control with Push Dim for professional indoor and outdoor systems.

- DALI and Push dimming from 0-100% with PWM output
- NFC-adjustable output voltage with active power-factor correction
- Short-circuit, overload and over-temperature protection; five-year warranty



INPUT	OUTPUT	PROTECTION	CONTROL
100-277V AC	12V / 24V DC	IP66	DALI-2 + PUSH

PART CODE	MAX LOAD	OUTPUT VOLTAGE	IP RATING
PSDALI-30-12/24	30W	12V / 24V DC	IP66
PSDALI-60-12/24	60W	12V / 24V DC	IP66
PSDALI-100-12/24	100W	12V / 24V DC	IP66
PSDALI-200-12/24	200W	12V / 24V DC	IP66

LED DRIVERS

PSDIM TRIAC Dimmable LED Driver Range

24V DC OUTPUT | 40W TO 150W | IP20 | LEADING / TRAILING EDGE

Reliable 24V constant-voltage drivers for smooth TRIAC dimming across professional LED tape installations.

- Flicker-free PWM dimming from 0-100%
- Leading- and trailing-edge compatibility with screw terminals and cable restraint
- Short-circuit, overload and over-voltage protection; five-year warranty

5
YEAR
WARRANTY

UKCA

CE



INPUT 176-264V AC	OUTPUT 24V DC	PROTECTION IP20	CONTROL TRIAC DIMMABLE
----------------------	------------------	--------------------	---------------------------

PART CODE	MAX LOAD	OUTPUT	IP RATING	DIMENSIONS
PSDIM-40-24	40W (1.66A)	24V DC	IP20	168.5 x 44 x 30MM
PSDIM-75-24	75W (3.12A)	24V DC	IP20	179 x 56 x 30MM
PSDIM-150-24	150W (6.25A)	24V DC	IP20	310 x 45 x 30MM

LED DRIVERS

PSTRIAC Premium TRIAC LED Driver Range

12V / 24V DC OUTPUT | 30W TO 200W | IP20 | LEADING / TRAILING EDGE

Premium constant-voltage drivers for demanding dimming installations, including automation and intelligent control systems.

- Leading- and trailing-edge TRIAC mains dimming
- Stable, flicker-free control at low loads across 12V and 24V LED products
- Four output ratings from 30W to 200W with a five-year warranty

5
YEAR
WARRANTY

UKCA

CE



INPUT 180-240V AC	OUTPUT 12V / 24V DC	PROTECTION IP20	CONTROL TRIAC DIMMABLE
----------------------	------------------------	--------------------	---------------------------

PART CODE	MAX LOAD	OUTPUT VOLTAGE	IP RATING
PSTRIAC-30P-12/24	30W	12V / 24V DC	IP20
PSTRIAC-60P-12/24	60W	12V / 24V DC	IP20
PSTRIAC-100P-12/24	100W	12V / 24V DC	IP20
PSTRIAC-200P-12/24	200W	12V / 24V DC	IP20

LED CONTROLS

LCI Wireless Control Interface Range

RF + WI-FI CONTROL | TUYA SMARTLIFE | 5-IN-1 LED CONTROL | 5 YEAR WARRANTY

Flexible control interfaces for single-colour, CCT, RGB, RGBW and RGB CCT LED installations.


- LCI-3A: 15A total load with flicker-free five-channel PWM output
- App control with scenes, schedules, sound-to-light and Amazon Alexa integration
- LCI-DMX converts app, remote or wall-plate commands to a wired DMX512 signal

5

YEAR
WARRANTY

UKCA

CE

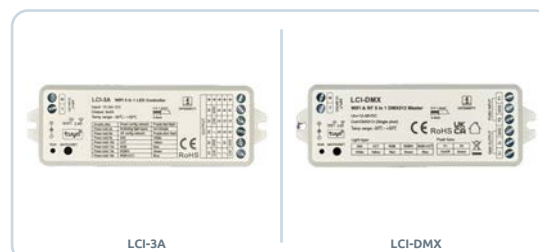

LCI-3A

LCI-DMX

INPUT 12-24V DC		OUTPUT 15A / DMX512		PROTECTION IP20	CONTROL RF + WI-FI
PART CODE	LOAD	CONTROL / OUTPUT		IP RATING	DIMENSIONS
LCI-3A	15A (5 x 3A)	12V / 24V DC		IP20	114 x 38 x 20MM
LCI-DMX	N/A	DMX512 SIGNAL		IP20	114 x 38 x 20MM

LED CONTROLS

WP Series RF Wall Plate Controller Range

4-ZONE RF CONTROL | SINGLE-COLOUR / RGB / RGBW | IP20 | 5 YEAR WARRANTY

Ultra-sensitive glass wall plates for convenient four-zone lighting control without additional control cabling.

- Pairs with LCI-3A and LCI-DMX interfaces
- WP1 provides dimming for static-colour LED tape; WP4 adds RGB and RGBW colour control
- CR2032 battery powered; fits a standard single back box or the supplied adhesive pad

5

YEAR
WARRANTY

UKCA

CE



WP1 DIMMING

WP4 RGB / RGBW

INPUT CR2032 BATTERY		OUTPUT 4 ZONES		PROTECTION IP20	CONTROL RF WALL PLATE
PART CODE	FINISH	CONTROL		IP RATING	DIMENSIONS
WP1-B	BLACK	DIMMING		IP20	86 x 86 x 9.5MM
WP1-W	WHITE	DIMMING		IP20	86 x 86 x 9.5MM
WP4-B	BLACK	RGB / RGBW		IP20	86 x 86 x 9.5MM
WP4-W	WHITE	RGB / RGBW		IP20	86 x 86 x 9.5MM

LED CONTROLS

RM Series 4-Zone RF Remote Control Range

4-ZONE RF CONTROL | DIMMING / CCT / RGB / RGBW | IP20 | 5 YEAR WARRANTY

Handheld four-zone RF remotes for direct use with the LCI-3A and LCI-DMX control interfaces.

- RM6 controls static-colour dimming; RM7 provides CCT control; RM9 controls RGB and RGBW
- Save individual scenes and recall brightness or colour settings across four zones
- Premium-touch black finish, supplied wall mount and 2 x AAA battery power

5

YEAR
WARRANTY

UKCA

CE



RM6 DIMMING



RM7 CCT



RM9 RGB / RGBW

INPUT
2 x AAAOUTPUT
4 ZONESPROTECTION
IP20CONTROL
2.4GHz RF

PART CODE	FINISH	CONTROL	IP RATING	DIMENSIONS
RM6	BLACK	DIMMING	IP20	122 x 53 x 75MM
RM7	BLACK	CCT DIMMING	IP20	122 x 53 x 75MM
RM9	BLACK	RGB / RGBW	IP20	122 x 53 x 75MM

LED CONTROLS

DMX-4A Five-Channel DMX Receiver

DMX512 + RDM | 5 x 4A OUTPUT | 20A MAXIMUM | IP20 | 5 YEAR WARRANTY

A five-channel constant-voltage receiver for complete wired control of single-colour, CCT, RGB, RGBW and RGB CCT LED lighting.

- Designed for the LCI-DMX interface and compatible DMX-based control systems
- Five independently addressable 4A channels with a 20A maximum total load
- On-device display and controls for fast DMX addressing and configuration

5

YEAR
WARRANTY

UKCA

CE

INPUT
12-48V DCOUTPUT
20A MAXIMUMPROTECTION
IP20CONTROL
DMX512 + RDM

PART CODE	MAX LOAD	OUTPUT	IP RATING	DIMENSIONS
DMX-4A	20A (5 x 4A)	12-48V DC	IP20	122 x 53 x 75MM

CONNECTORS

SR4 Dual-Head IR Door / Hand Sensor Switch

SURFACE OR RECESSED | TWO DETECTOR HEADS | 4A MAXIMUM | 3 YEAR WARRANTY

Compact two-detector switching for automatic LED lighting control in cabinets, wardrobes and furniture.

- Door and hand-wave operating modes selectable at the controller
- Two detector heads for double doors or sliding-door installations; one or both may be used
- Surface or recessed mounting with a 0.5-10cm infrared detection range



INPUT 12V / 24V DC	OUTPUT 4A MAXIMUM	PROTECTION IP20	CONTROL DOOR / HAND
-----------------------	----------------------	--------------------	------------------------

PART CODE	MAX CURRENT	MAXIMUM LOAD	DETECTION	SENSOR HEAD
SR4	4A DC	48W @ 12V / 96W @ 24V	0.5-10CM	11MM DIA x 18MM


CONNECTORS

Hippo LED Tape Connector Range

8MM / 10MM LED TAPE | INPUT / JOINT / LINK | 2.5A MAXIMUM | 3 YEAR WARRANTY

Quick-fit, solder-free connectors for reliable on-site termination and joining of 8mm and 10mm LED tape.

- Input connectors provide a pre-wired feed to the LED tape
- Joint connectors create a compact tape-to-tape connection
- Link connectors bridge separated tape sections with a flexible cable

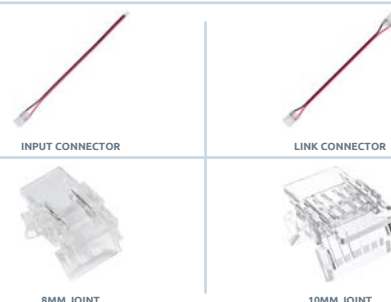

INPUT 12V / 24V DC	OUTPUT 2.5A MAXIMUM	PROTECTION IP20	CONTROL SOLDER-FREE
-----------------------	------------------------	--------------------	------------------------

PART CODE	MAX LOAD	OUTPUT	IP RATING	CONNECTOR TYPE
HIPPO-8MM-IC	2.5A	12V / 24V DC	IP20	INPUT CONNECTOR - 8MM
HIPPO-10MM-IC	2.5A	12V / 24V DC	IP20	INPUT CONNECTOR - 10MM
HIPPO-8MM-JC	2.5A	12V / 24V DC	IP20	JOINT CONNECTOR - 8MM
HIPPO-10MM-JC	2.5A	12V / 24V DC	IP20	JOINT CONNECTOR - 10MM
HIPPO-8MM-LC	2.5A	12V / 24V DC	IP20	LINK CONNECTOR - 8MM
HIPPO-10MM-LC	2.5A	12V / 24V DC	IP20	LINK CONNECTOR - 10MM

CONNECTORS

Plug-and-Play JST Wiring Accessories

12V / 24V DC | INPUT / EXTENSION LEADS | 3-WAY / 6-WAY DISTRIBUTION | 3A MAXIMUM

Two-pin 12V and 24V DC JST cables and accessories for fast, modular wiring of LED tape, sensors and furniture lighting.

- 1800mm input lead provides a JST connection to stripped cable ends
- 1800mm male-to-female extension lead increases installation flexibility
- Three-way and six-way distributors simplify multi-fitting installations

3
YEAR
WARRANTY

UKCA

CE



INPUT 12V / 24V DC	OUTPUT 3A MAXIMUM	PROTECTION IP20	CONTROL 2-PIN JST
-----------------------	----------------------	--------------------	----------------------

PART CODE	TYPE	LENGTH / PORTS	MAX LOAD	CONNECTION
JST-1800MM	INPUT LEAD	1800MM	3A	JST TO STRIPPED ENDS
JST-EXTENSION	EXTENSION	1800MM	3A	MALE / FEMALE JST
JST-3WAY	DISTRIBUTOR	3-WAY	3A	FEMALE JST OUTPUTS
JST-6WAY	DISTRIBUTOR	6-WAY	3A	FEMALE JST OUTPUTS

CONNECTORS

SLVT01 Surface Low-Voltage Shelving Track

12V / 24V DC | 2M TRACK | 25A TRACK / 4A ADAPTER | 3 YEAR WARRANTY

A slim surface-mounted track system for adjustable illuminated shelving in retail and display installations.

- Available in white, grey or black with a slim 20.3mm track width
- Adapters rotate securely into position and allow shelves to be repositioned without rewiring
- Up to 100W per adapter at 24V DC; UKCA approved

3
YEAR
WARRANTY

UKCA

CE



INPUT 12V / 24V DC	OUTPUT 25A TRACK	PROTECTION INDOOR USE	CONTROL ROTATING ADAPTER
-----------------------	---------------------	--------------------------	-----------------------------

PART CODE	COMPONENT	SIZE	MAX LOAD	FINISHES
SLVT01-2M-W/B/G	2M TRACK	20.3 x 5.7MM	25A	WHITE / BLACK / GREY
SLVT01-TA-W/B/G	ADAPTER	20.75 x 20.75MM	4A	WHITE / BLACK / GREY
SLVT01-IL-W/B/G	INPUT LEAD	46.8 x 20.2MM	8A	WHITE / BLACK / GREY
SLVT01-EC-W/B/G	END CAP	20.3 x 5.7MM	N/A	WHITE / BLACK / GREY

ALUMINIUM PROFILES

Select a profile by installation type

01 **SURFACE**

Pages 33-34

02 **RECESSED**

Page 35

03 **CORNER**

Page 36

04 **PLASTER-IN**

Page 37

05 **TILE-IN**

Page 38

06 **SPECIAL**

Page 39



SURFACE

BEGTON12

SURFACE-MOUNTED LED PROFILE

Low-profile surface-mounted LED extrusion

- 14.4mm overall width and 6.6mm overall height
- Internal LED-source space: 12.6mm wide
- Slide-in diffuser cover
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black




SURFACE

FIX12

SURFACE-MOUNTED LED PROFILE

Ultra-low-profile mounting and heat-dissipation rail for exposed LED

- Overall profile size: 17mm wide x 3.8mm high
- Maximum LED strip width: 12mm
- Open profile; designed for use without a diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

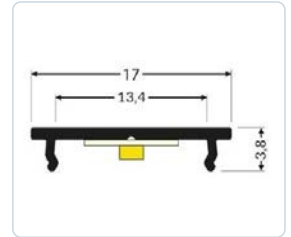


SURFACE

FIX16

SURFACE-MOUNTED LED PROFILE

Ultra-low-profile mounting and heat-dissipation rail for exposed LED

- Overall profile size: 20.5mm wide x 3.8mm high
- Maximum LED strip width: 16mm
- Open profile; designed for use without a diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

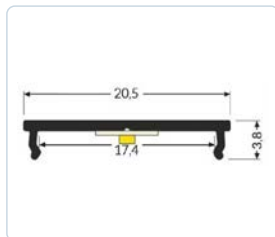


SURFACE

LINEA20

SURFACE-MOUNTED LED PROFILE

Deep surface profile for wide, high-output LED strip

- Overall profile size: 23mm wide x 25.1mm high
- Maximum LED strip width: 20mm
- E slide-in or F click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

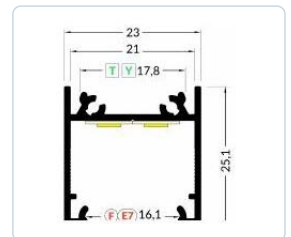


SURFACE

PHIL.V2

SURFACE PROFILE

SURFACE OR SUSPENDED LIGHTING PROFILE Large-format architectural

- Overall profile size: 53mm wide x 53mm high
- Maximum LED strip width: 32.8mm
- C10 PRO, narrow, opal, wide or basic diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

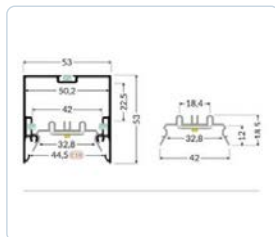


SURFACE

PHIL53

SURFACE PROFILE

SURFACE OR SUSPENDED LIGHTING PROFILE Large-format architectural

- Overall profile size: 53mm wide x 53mm high
- Maximum LED strip width: 46mm
- C10 opal, narrow, wide or aluminium cover options
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

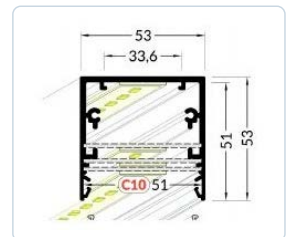


SURFACE

SLIM8

SURFACE-MOUNTED LED PROFILE

Ultra-slim surface profile for compact linear lighting

- Overall profile size: 12.2mm wide x 7.7mm high
- Maximum LED strip width: 8mm
- A slide-in or C2 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

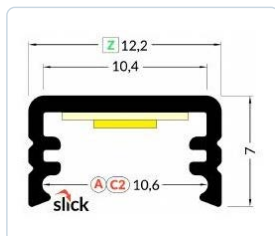


SURFACE

SMART10

SURFACE-MOUNTED LED PROFILE

Compact square surface profile for neat linear illumination

- Overall profile size: 12mm wide x 12.2mm high
- Maximum LED strip width: 10mm
- A slide-in or C2 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

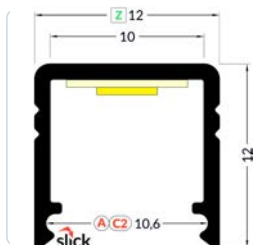

SURFACE

SMART16

SURFACE-MOUNTED LED PROFILE

Square surface profile for wider LED strip and higher output

- Overall profile size: 18.8mm wide x 18.6mm high
- Maximum LED strip width: 16mm
- B slide-in or C3 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black




SURFACE

SURFACE10

SURFACE-MOUNTED LED PROFILE

Low-profile wide surface extrusion with multiple diffuser options

- Overall profile size: 20mm wide x 6.8mm high
- Maximum LED strip width: 10mm
- B slide-in, C click-fit or C click/line diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

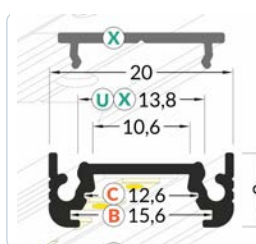


SURFACE

SURFACE14

SURFACE-MOUNTED LED PROFILE

Wide low-profile surface extrusion with a choice of diffuser styles

- Overall profile size: 24mm wide x 7mm high
- Maximum LED strip width: 14mm
- E/F slide-in or E7 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

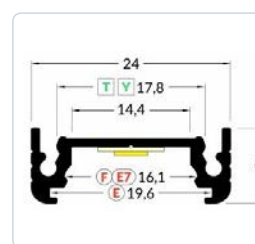


SURFACE

UNI12

SURFACE-MOUNTED LED PROFILE

Versatile surface profile supporting flat and curved diffusers

- Overall profile size: 18mm wide x 11.5mm high
- Maximum LED strip width: 12mm
- B slide-in, C click/line or D click diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

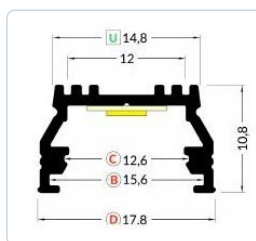


SURFACE

UNI14

SURFACE-MOUNTED LED PROFILE

Dual-purpose surface and furniture profile

- Overall profile size: 17.6mm wide x 10mm high
- Maximum LED strip width: 14mm
- B slide-in or C3 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

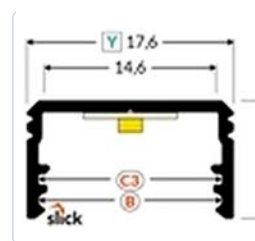


SURFACE

WIDE24

SURFACE-MOUNTED LED PROFILE

Extra-wide surface profile for multi-row and high-output LED strip

- Overall profile size: 32mm wide x 11.1mm high
- Maximum LED strip width: 24mm
- G slide-in diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

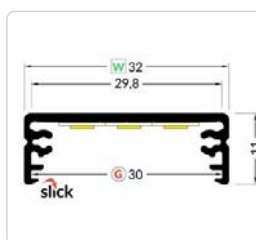


RECESSED

BEGTIN12

RECESSED LED PROFILE

Low-profile recessed extrusion for discreet linear illumination

- Overall profile size: 21.3mm wide x 6.6mm high
- Maximum LED strip width: 12mm
- S slide-in or J click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

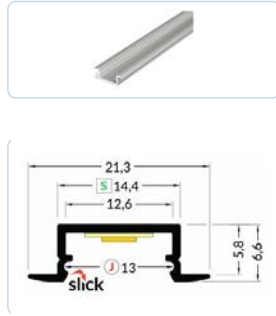


RECESSED

DIAGONAL14

RECESSED LED PROFILE

Recessed angled profile for controlled directional illumination

- Overall profile size: 30mm wide x 24mm high
- Maximum LED strip width: 14mm
- F click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

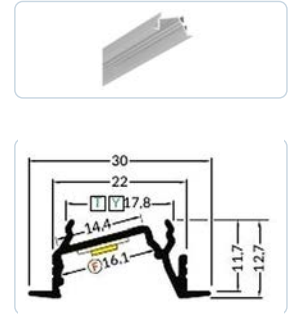


RECESSED

FLAT8

RECESSED LED PROFILE

Wide recessed edge profile for low-level and stair illumination

- Overall profile size: 53mm wide x 13.5mm high
- Maximum LED strip width: 8mm
- U or X diffuser option
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

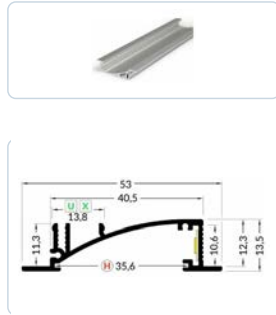


RECESSED

GROOVE10

RECESSED LED PROFILE

Compact recessed profile for clean flush linear lighting

- Overall profile size: 24mm wide x 7mm high
- Maximum LED strip width: 10mm
- B slide-in or C click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

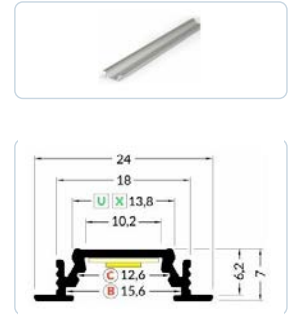


RECESSED

GROOVE14

RECESSED LED PROFILE

Wide recessed profile with a choice of diffuser styles

- Overall profile size: 28mm wide x 8mm high
- Maximum LED strip width: 14mm
- E/F slide-in or E7 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

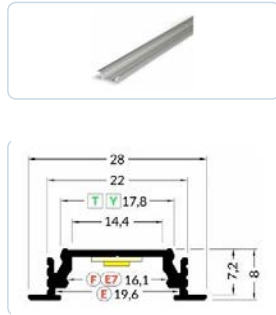


RECESSED

H18

RECESSED LED PROFILE

Compact recessed corner profile for angled linear illumination

- Overall profile size: 12.2mm wide x 8.2mm high
- Maximum LED strip width: 8mm
- C1 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

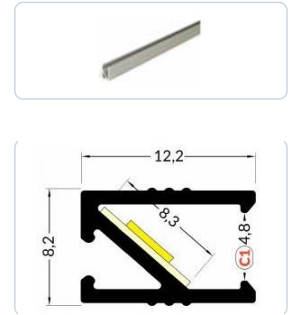


RECESSED

LINEA-IN20

RECESSED LED PROFILE

Deep recessed profile for wide, high-output LED strip

- Overall profile size: 30mm wide x 20.4mm high
- Maximum LED strip width: 20mm
- E/F slide-in or E7 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

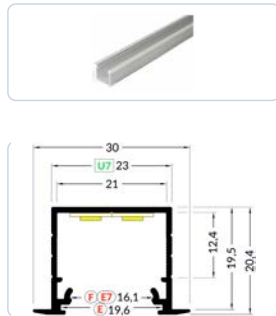


RECESSED

SLASH8

RECESSED LED PROFILE

Asymmetric recessed profile for a defined slash of light

- Overall profile size: 13mm wide x 16.5mm high
- Maximum LED strip width: 8mm
- Integrated opal diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

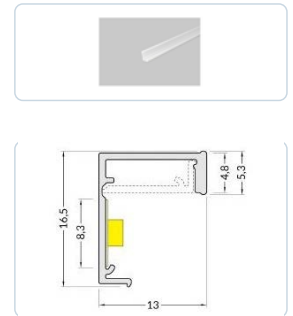


RECESSED

SMART-IN10

RECESSED LED PROFILE

Compact recessed profile for neat flush linear illumination

- Overall profile size: 18.8mm wide x 12mm high
- Maximum LED strip width: 10mm
- A slide-in or C2 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

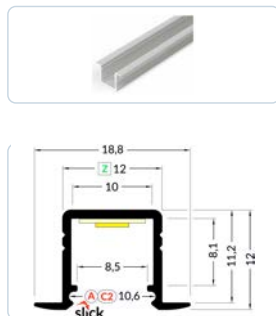


RECESSED

SMART-IN16

RECESSED LED PROFILE

Wide recessed profile for higher-output LED strip

- Overall profile size: 28mm wide x 18.6mm high
- Maximum LED strip width: 16mm
- B slide-in or C3 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

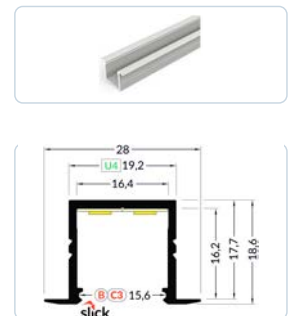


CORNER

CABI12-DUO

CORNER LED PROFILE

Dual-surface corner profile for continuous cabinet illumination

- Overall profile size: 16.5mm wide x 16.5mm high
- Maximum LED strip width: 12mm
- E slide-in diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

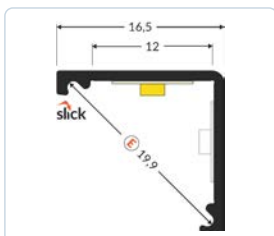


CORNER

CABI12

CORNER LED PROFILE

Compact corner profile for cabinet and furniture illumination

- Overall profile size: 16.5mm wide x 16.5mm high
- Maximum LED strip width: 12mm
- E slide-in diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

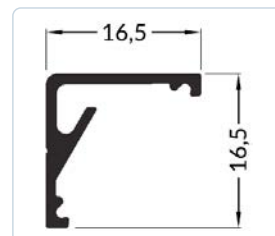


CORNER

CORNER10

CORNER LED PROFILE

Angled corner profile with flexible mounting options

- Overall profile size: 20mm wide x 16mm high
- Maximum LED strip width: 10mm
- B slide-in or C click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

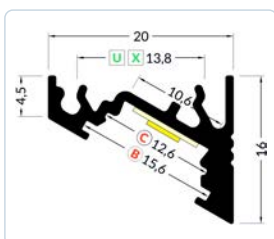


CORNER

CORNER10.v2

CORNER LED PROFILE

Compact second-generation corner profile for clean linear lighting

- Overall profile size: 16.1mm wide x 15.2mm high
- Maximum LED strip width: 10mm
- A1 slide-in or C click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

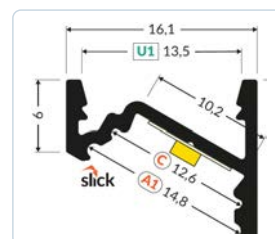


CORNER

CORNER12.v2

CORNER LED PROFILE

Second-generation corner profile for wider LED strip

- Overall profile size: 20mm wide x 18mm high
- Maximum LED strip width: 12mm
- E slide-in or F click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

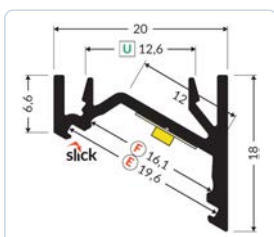


CORNER

CORNER14

CORNER LED PROFILE

Wide corner profile with multiple diffuser and fixing options

- Overall profile size: 24mm wide x 19.4mm high
- Maximum LED strip width: 14mm
- E/F slide-in or E7 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

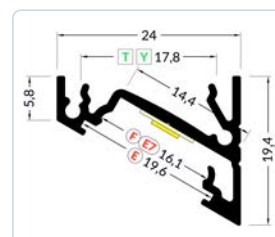


CORNER

CORNER16.v2

CORNER LED PROFILE

Wide second-generation corner profile for high-output LED strip

- Overall profile size: 24mm wide x 19.5mm high
- Maximum LED strip width: 16mm
- A6 slide-in or C6 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

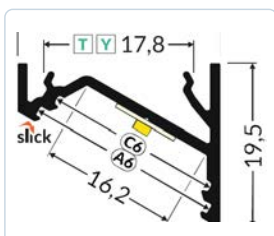


CORNER

QUARTER10

CORNER LED PROFILE

Quarter-round corner profile for soft curved illumination

- Overall profile size: 14.5mm wide x 14.5mm high
- Maximum LED strip width: 10mm
- B/D diffuser options
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

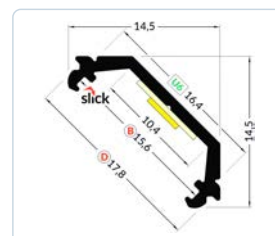


PLASTER IN

FRAME14

PLASTER-IN LED PROFILE

Purpose-designed for installation beside plasterboard or suspended ceilings

- Overall profile size: 69.1mm wide x 25.1mm high
- Maximum LED strip width: 14mm
- B slide-in or C3 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

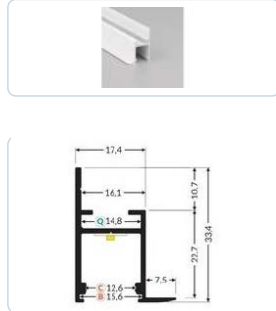


PLASTER IN

GLOW12-DOWN

SPECIAL APPLICATION LED PROFILE

Architectural plaster-in profile for downward indirect illumination

- Overall profile size: 35.2mm wide x 28.6mm high
- Maximum LED strip width: 12mm
- C click-fit or A1 slide-in diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

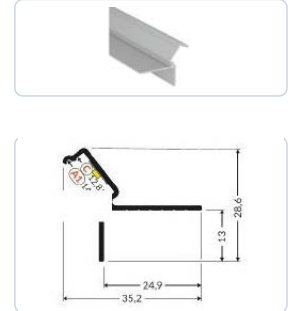


PLASTER IN

GLOW12-UP

SPECIAL APPLICATION LED PROFILE

Architectural plaster-in profile for upward indirect illumination

- Overall profile size: 37mm wide x 25.9mm high
- Maximum LED strip width: 12mm
- C click-fit or A1 slide-in diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

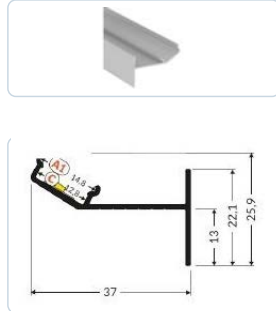


PLASTER IN

HIDE10-C4-PLUS

PLASTER-IN LED PROFILE

Concealed plaster-in profile with perforated fixing flanges

- Overall profile size: 50.4mm wide x 11.7mm high
- Maximum LED strip width: 10mm
- C4 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

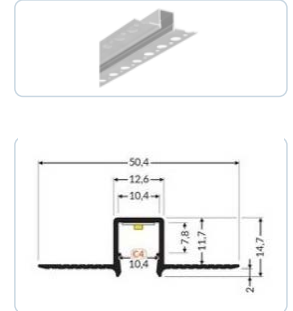


PLASTER IN

HIDE10

PLASTER-IN LED PROFILE

Compact plaster-in profile for a clean, trimless line of light

- Overall profile size: 50.4mm wide x 11.7mm high
- Maximum LED strip width: 10mm
- C4 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

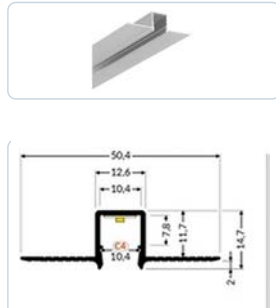


PLASTER IN

LINEA-IN20-TRIMLESS

PLASTER-IN LED PROFILE

Deep trimless plaster-in profile for wide, high-output LED strip

- Overall profile size: 53.2mm wide x 20.4mm high
- Maximum LED strip width: 20mm
- E/F slide-in or E7 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

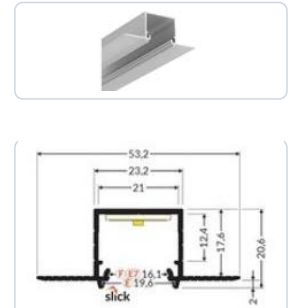


PLASTER IN

OMNI10

PLASTER-IN LED PROFILE

Plaster-in edge profile for integrated wall and ceiling details

- Overall profile size: 38.6mm wide x 21.6mm high
- Maximum LED strip width: 10mm
- A slide-in or C2 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

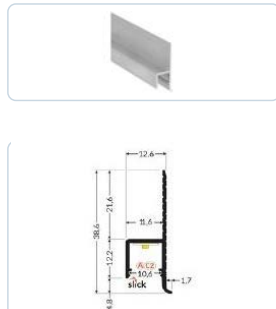


PLASTER IN

PLANE14-IN

PLASTER-IN LED PROFILE

Architectural plaster-in profile for a fully integrated linear light

- Overall profile size: 52mm wide x 17.4mm high
- Maximum LED strip width: 14mm
- B slide-in or C3 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

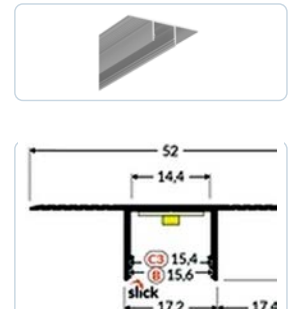


PLASTER IN

PLANE14-SIDE

PLASTER-IN LED PROFILE

Side-entry plaster-in profile for architectural edge illumination

- Overall profile size: 34.6mm wide x 17.4mm high
- Maximum LED strip width: 14mm
- B slide-in or C3 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

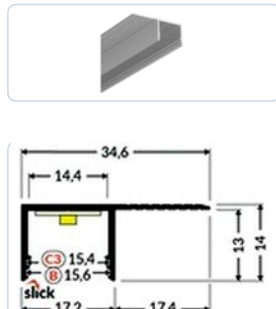


PLASTER IN

SMOOTH12

PLASTER-IN LED PROFILE

Curved plaster-in profile for smooth illuminated wall transitions

- Overall profile size: 31.8mm wide x 55.4mm high
- Maximum LED strip width: 12mm
- B slide-in or C click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

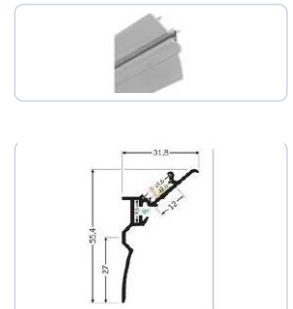


TILE IN

FLOOR12

FLOOR / TILE-IN LED PROFILE

Deep floor profile for robust flush-mounted linear illumination

- Overall profile size: 15.8mm wide x 16.3mm high
- Maximum LED strip width: 12mm
- K click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

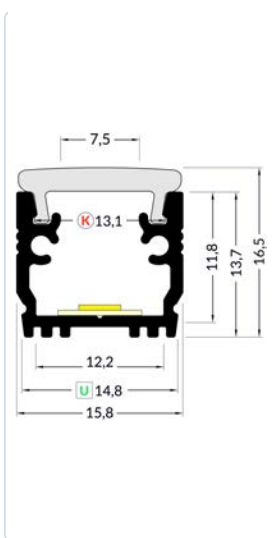


TILE IN

FLOOR8

FLOOR / TILE-IN LED PROFILE

Compact floor profile for flush tile and floor illumination

- Overall profile size: 15.8mm wide x 10.5mm high
- Maximum LED strip width: 8mm
- K click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

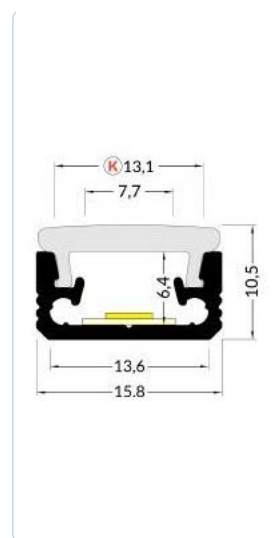





TILE IN

UNI-TILE12

FLOOR / TILE-IN LED PROFILE


Under-tile profile system for illuminated joints and corners

- Overall profile size: 90°: 39.9mm | 180°: 33.5mm | 270°: 36.6mm
- Maximum LED strip width: 12mm
- C click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

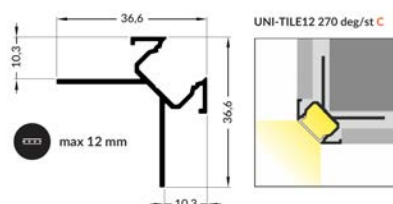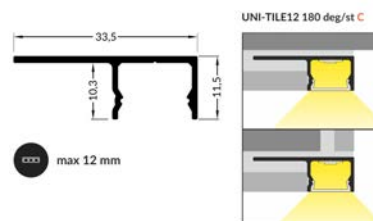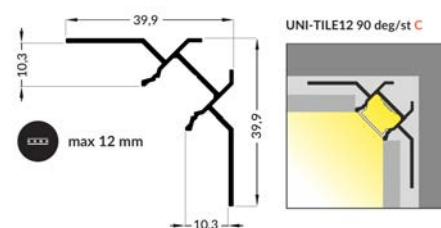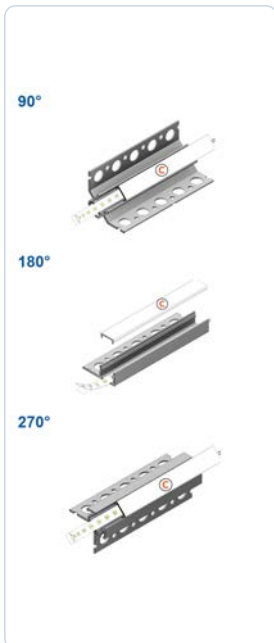

SPECIAL APPLICATION LED PROFILE

- Overall profile size: 20mm wide x 3.3mm high per profile
- Maximum LED strip width: 12mm
- C click-fit or D click-fit diffuser, two light directions
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

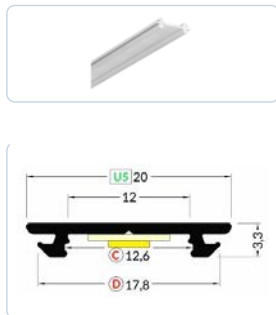


SPECIAL APPLICATION LED PROFILE

- Overall profile size: 17.5mm wide x 5.5mm high
- Maximum LED strip width: 12mm
- C or D click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black




SPECIAL APPLICATION LED PROFILE

- Overall profile size: 18.8mm wide x 10mm high
- Maximum LED strip width: 10mm
- A slide-in diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

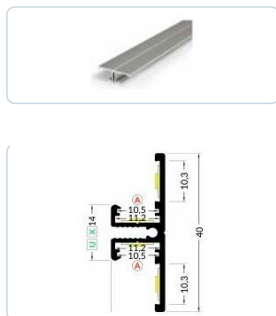


SPECIAL APPLICATION LED PROFILE

- Overall profile size: 20mm diameter
- Maximum LED strip width: 12mm
- J slide-in, C click-fit or C lens diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

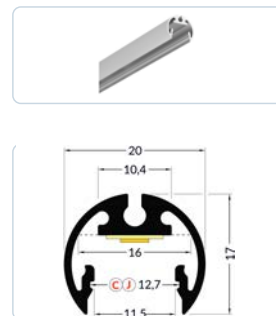


SPECIAL APPLICATION LED PROFILE

- Overall profile size: 13mm diameter
- Maximum LED strip width: 8mm
- 1 slide-in diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

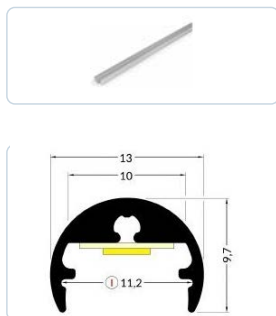


SPECIAL APPLICATION LED PROFILE

- Overall profile size: 59.8mm high x 10.8mm deep
- Maximum LED strip width: 10mm
- A slide-in or C2 click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

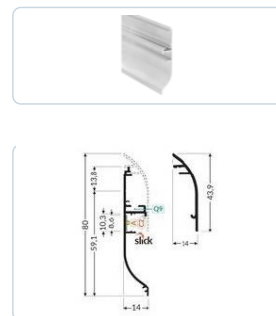


SPECIAL APPLICATION LED PROFILE

- Overall profile size: 58.9mm wide x 27.5mm high
- Maximum LED strip width: 12mm
- K click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

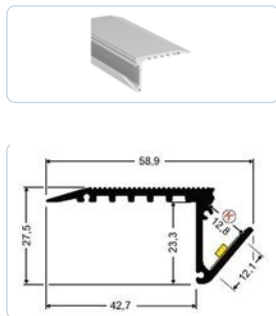

SPECIAL APPLICATION LED PROFILE

- Overall profile size: 46.7mm wide x 14.1mm high
- Maximum LED strip width: 10mm
- A slide-in diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

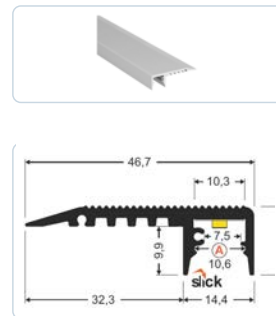


SPECIAL APPLICATION LED PROFILE

- Overall profile size: 55mm high architectural profile
- Maximum LED strip width: 12mm
- B slide-in, C click-fit or D click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black




SPECIAL APPLICATION LED PROFILE

- Overall profile size: 15.4mm deep x 32mm high
- Maximum LED strip width: 10mm
- C click-fit diffuser
- Available lengths: 2m, 3m and 4m
- Finishes: raw, anodised, white and black

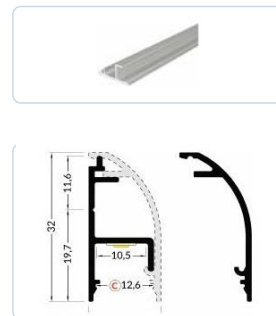

INTEGRITY

LIGHTING SOLUTIONS

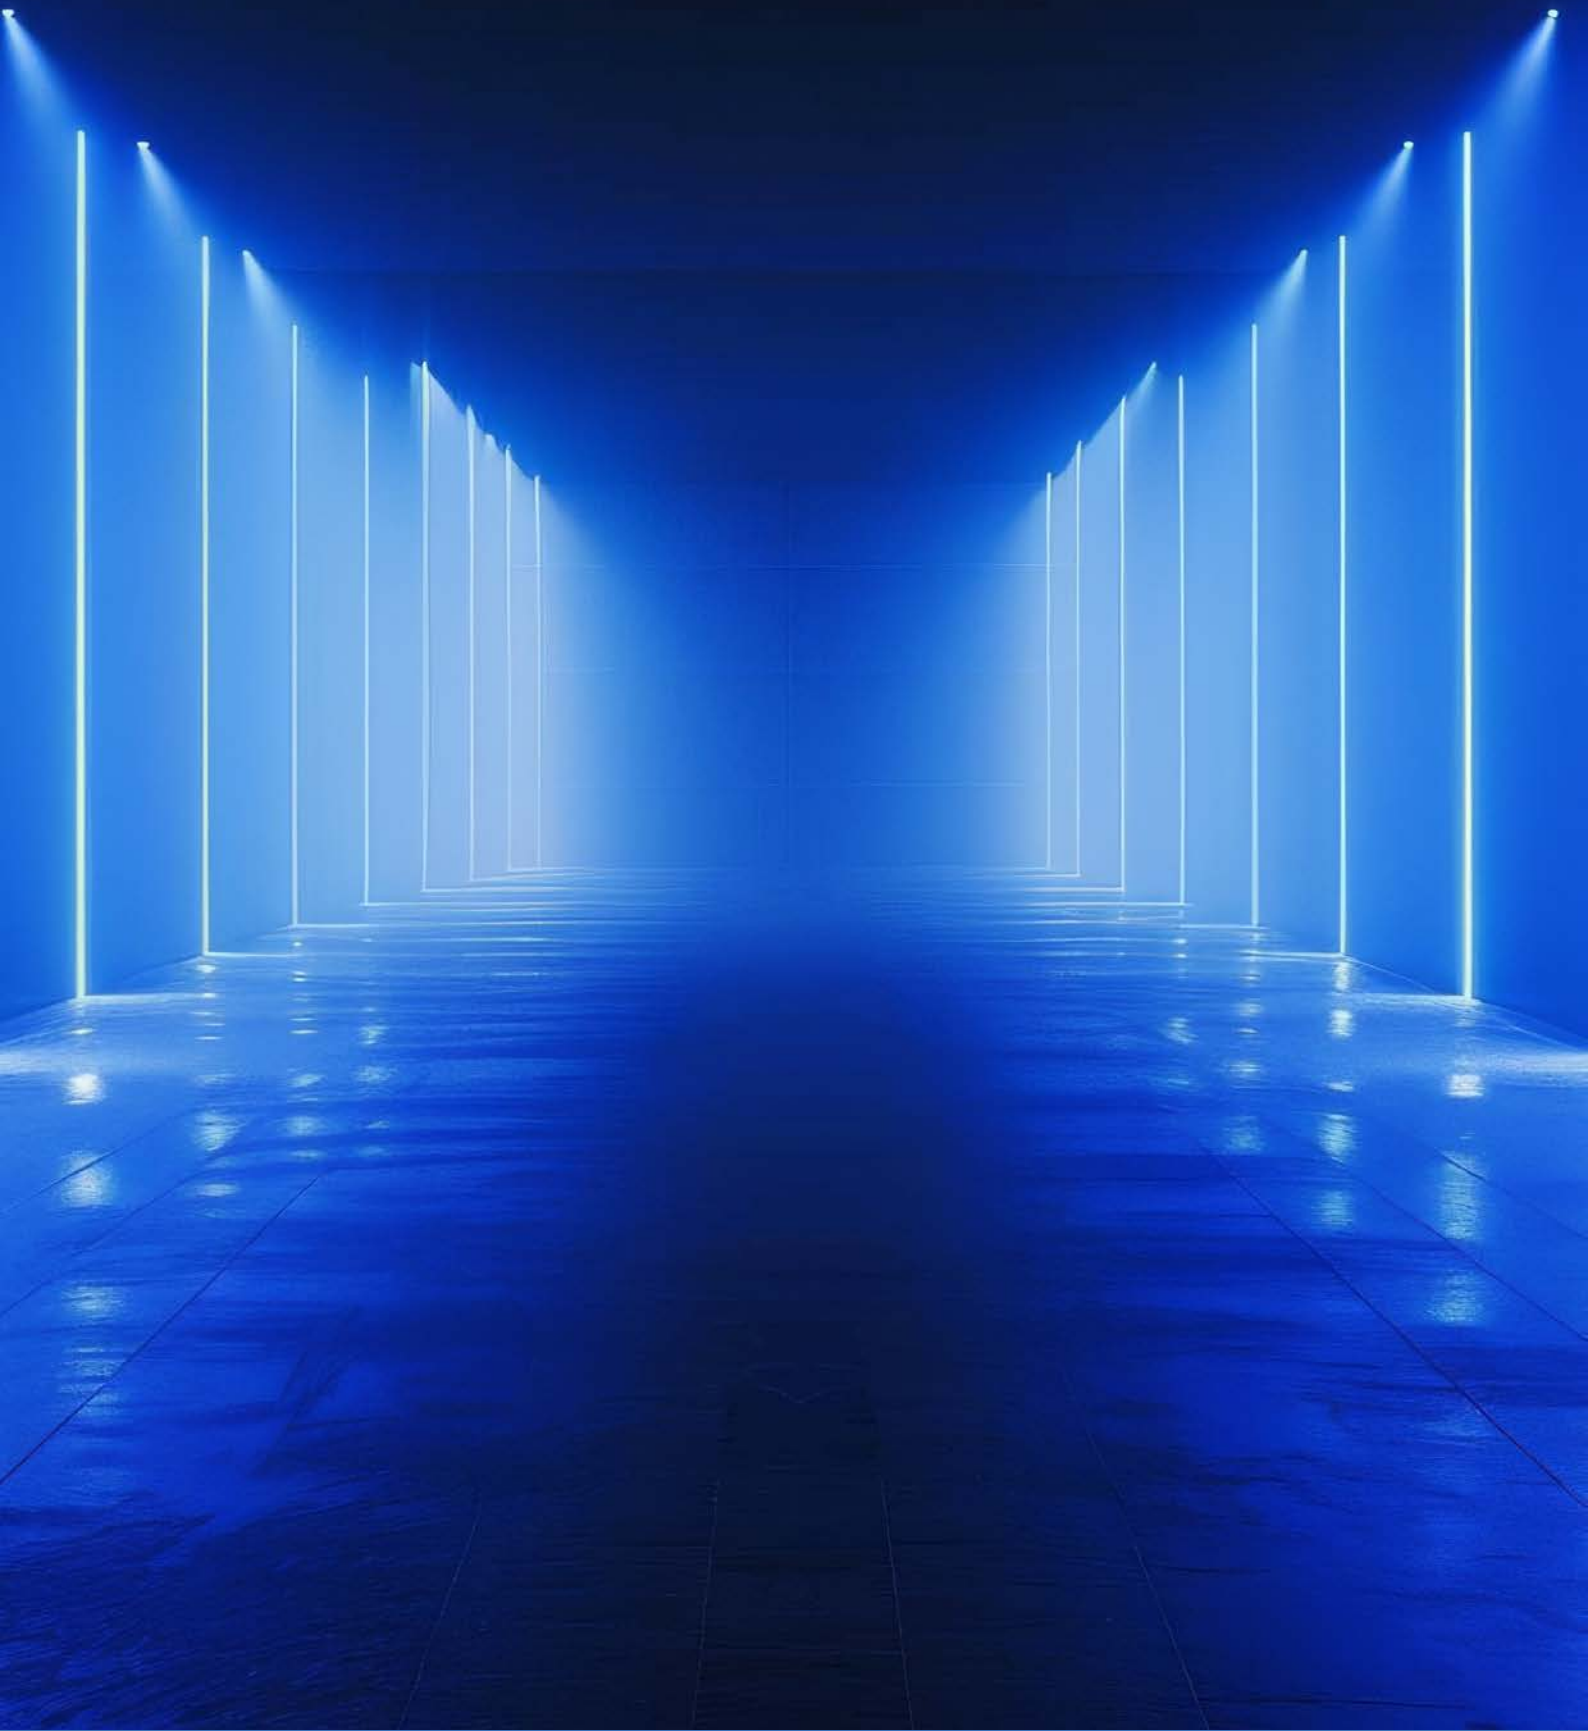

INTEGRITY LIGHTING SOLUTIONS LTD

15 Kernan Drive, Loughborough, LE11 5JF

0116 436 2450 | sales@integritylighting.co.uk

www.integritylighting.co.uk